
RGOS


2120355037503760575010.X

21

10.X

FLASH

config.text

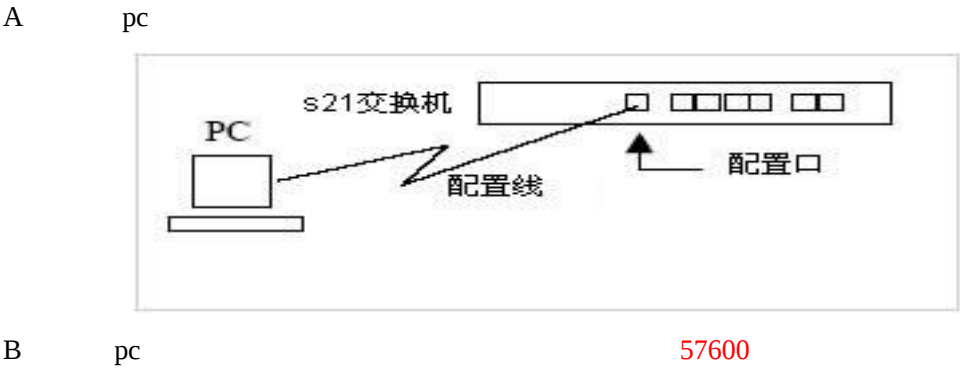



3


“ ”

“ ESC ”

ctrl


config.text

Continue with configuration dialog ?[y/n] y

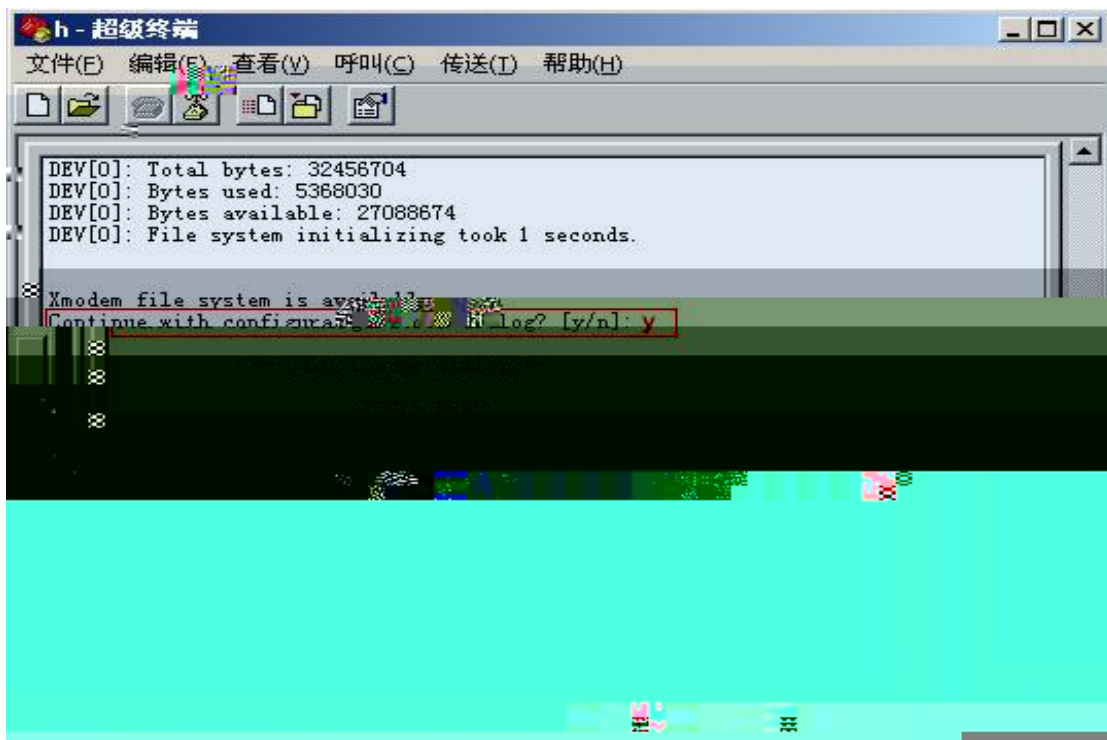

4—delete file ;

input filename:config.text ; y 6

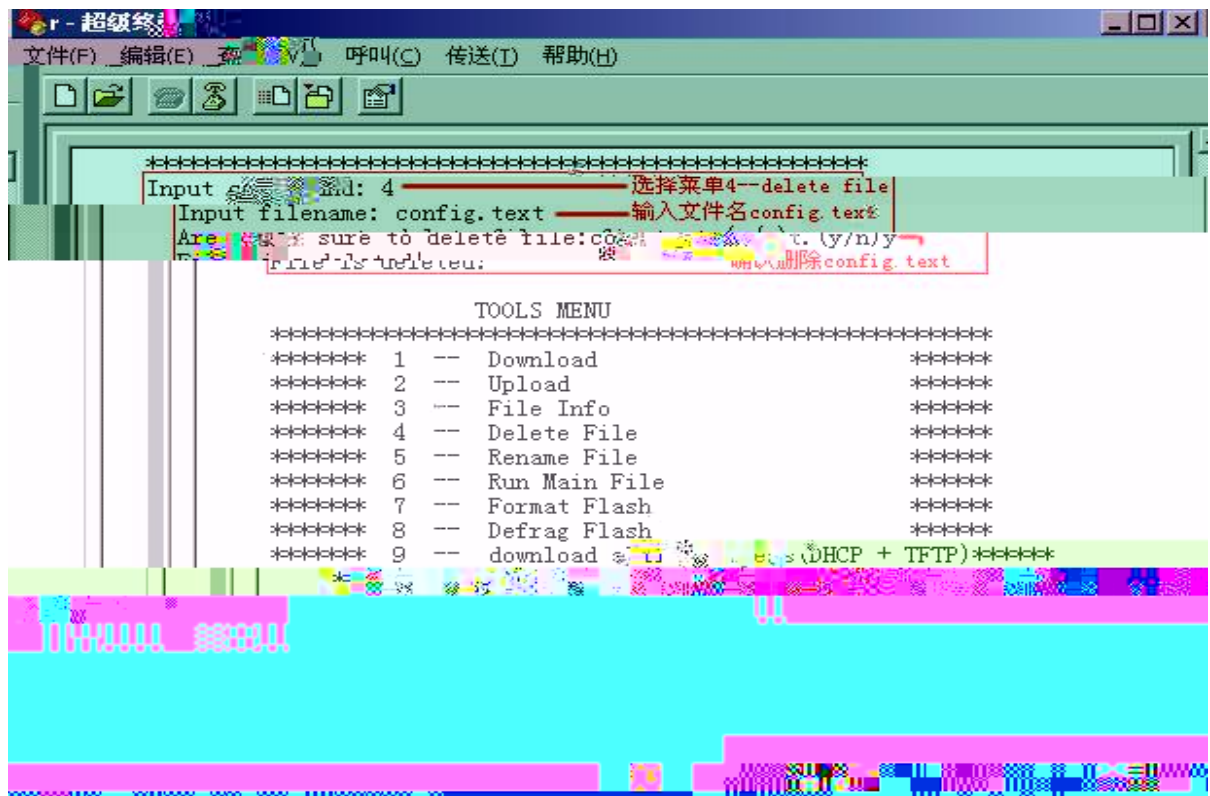


D. 6—Run Main File

E. 9600 console



E. start: Enable sec level 15 0 start

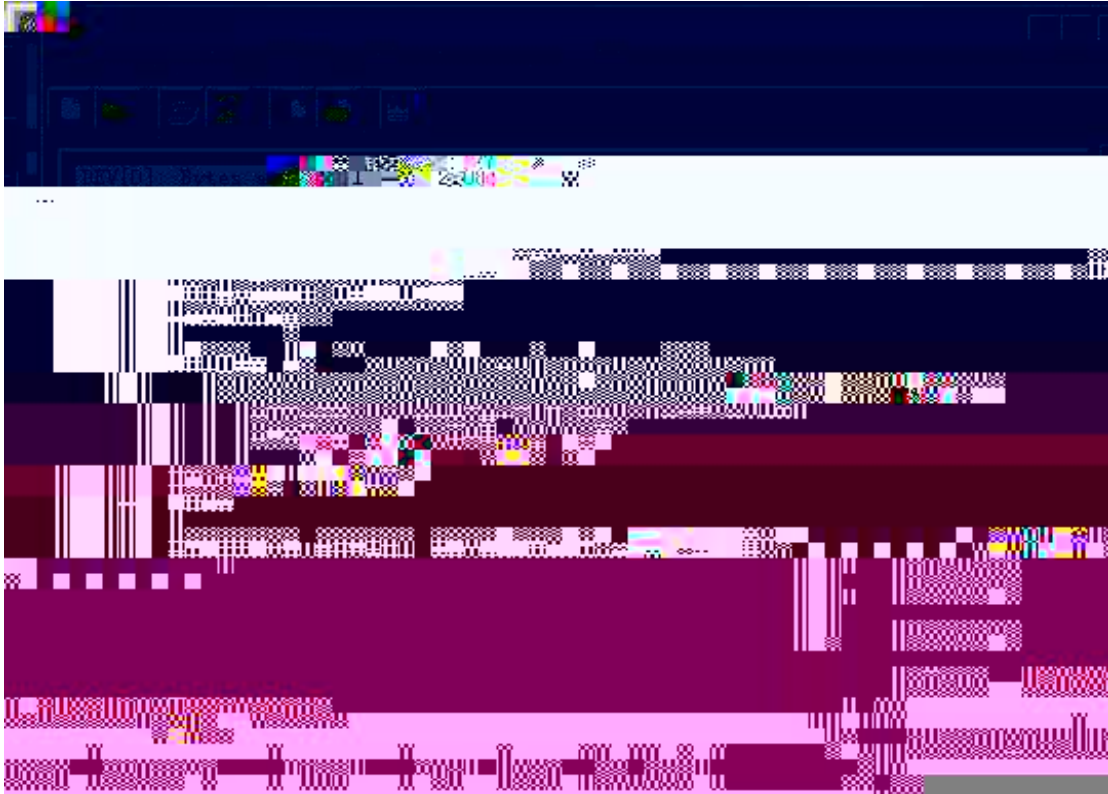


649	live	cli11.htm
649	live	cli12.htm
649	live	cli13.htm
649	live	cli14.htm
649	live	cli15.htm
1147	live	index.htm
2251	live	vms15.htm
1285062	live	webclt.jar
314192	live	image.jar
2274	dead	accessproxy.dat
2274	dead	accessproxy.dat
133	dead	config.text
48	dead	vlan.dat
4	dead	priority.dat
2274	dead	accessproxy.dat
2274	dead	accessproxy.dat
2274	dead	accessproxy.dat
2274	dead	accessproxy.dat
250	live	config.text
48	live	vlan.dat
4	live	priority.dat
2274	live	accessproxy.dat

72 files, 5344732 bytes, 27088430 free bytes.



config.text

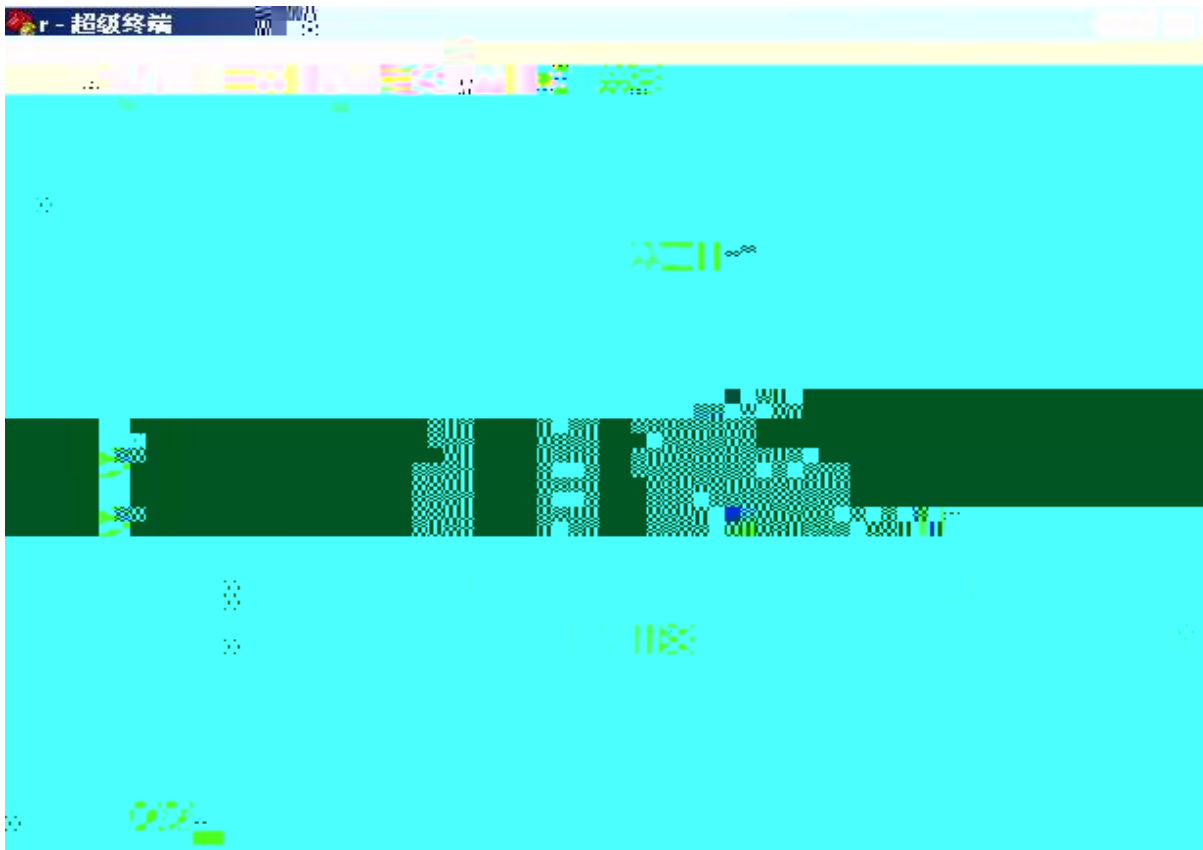


CTRL


CTRL

CTRL

pc config.text

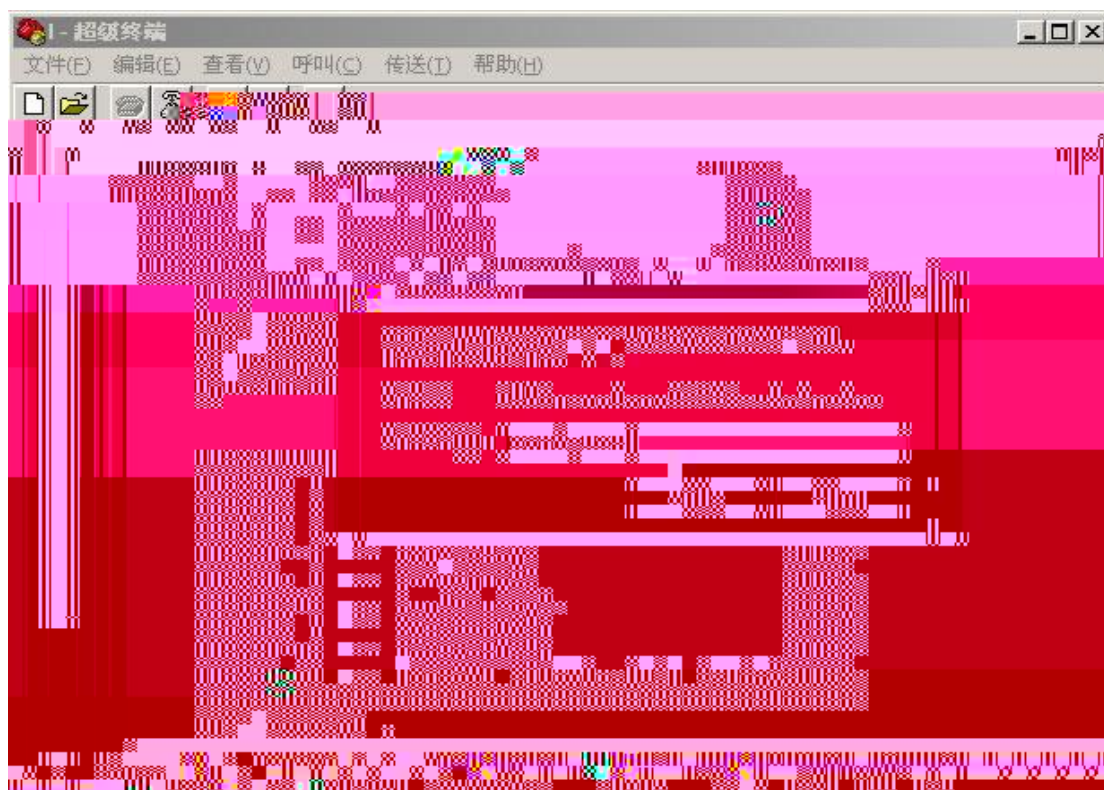

1k Xmodem

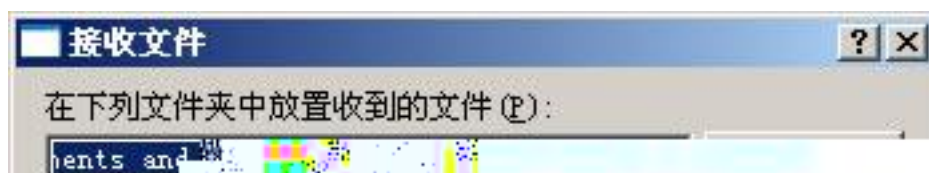

```
!  
version 1.0  
!  
hostname s21  
vlan 1  
!  
enable secret level 1 5 $2>H.Y*T3;C,tZ[V4<D+S(\WQ=G1X)sv  
enable secret level 15 5 $2tj9=G13/7R:>H.41u_;C,tQ8U0<D+S  
!  
interface vlan 1  
no shutdown  
ip address 192.168.26.49 255.255.255.0  
!  
end
```

```
!  
version 1.0  
!  
hostname s21  
vlan 1  
  
!  
interface vlan 1  
no shutdown  
ip address 192.168.26.49 255.255.255.0  
!  
End
```


config.text
flash


input command 1,
input filename:config.text
—b




config.text,

config.text

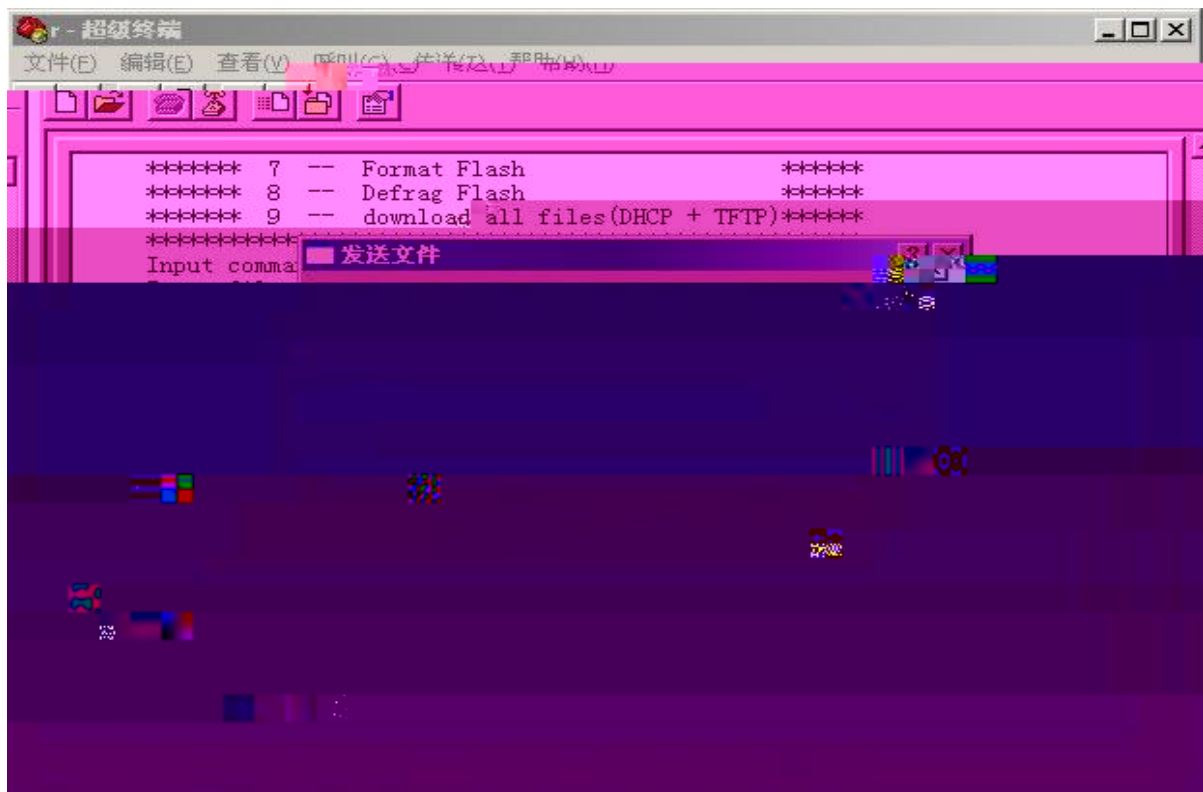

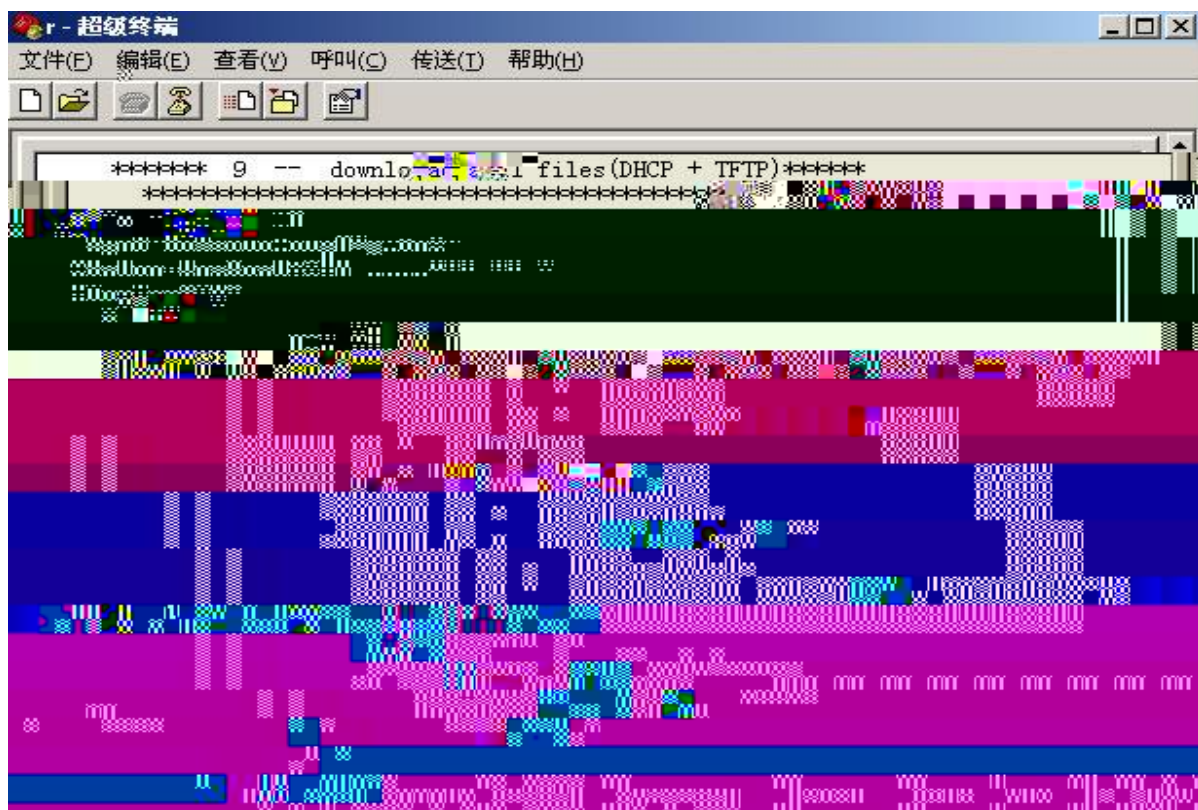

6,

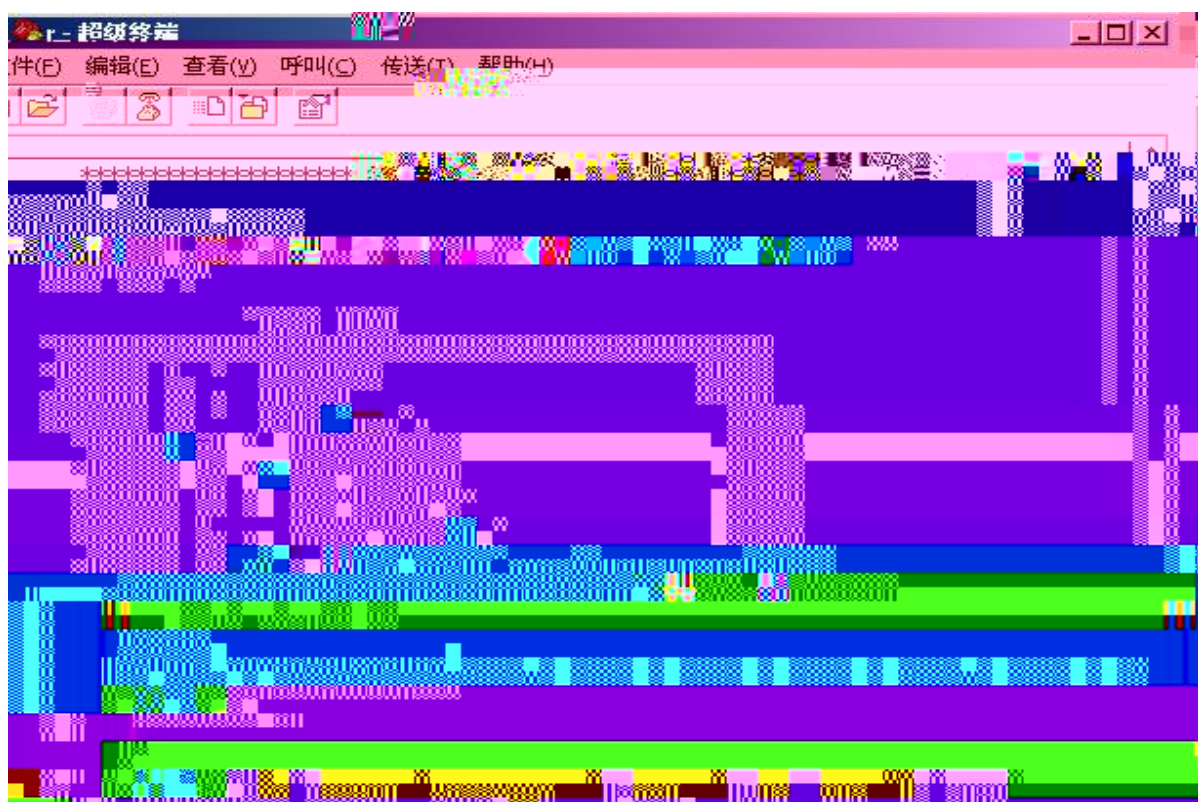

9600



star

s21>enable

s21#config t
