



RG-OAS


V1.1

- <http://www.ruijie.com.cn/>
- <http://webchat.ruijie.com.cn>
- <http://www.ruijie.com.cn/service.aspx>
- 7× 24 4008-111-000
- <http://support.ruijie.com.cn>
- service@ruijie.com.cn





RG-OAS

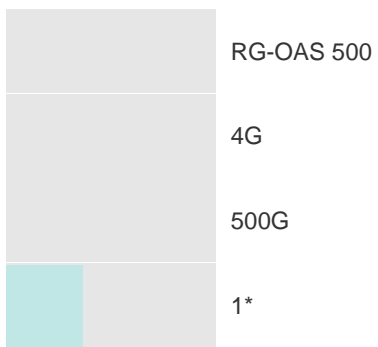


RG-OAS 500 1-2

1-2 RG-OAS 500

←



1-2




<5s


	RG-OAS 1000
	4G
	1T
	1* RJ45
USB	2
	6*10/100/1000Base-T()
	350W
	1+1
	0 to




1-2



	RG-OAS 2000
	8G
	2T
	1* RJ45
USB	2
	6*10/100/1000Base-T()
	350W
	0 to 50°C
	-20 to 70°C
	10% 95% RH
	16.5kg
	2U 19 430mm(W)x500mm(D)x88mm(H)

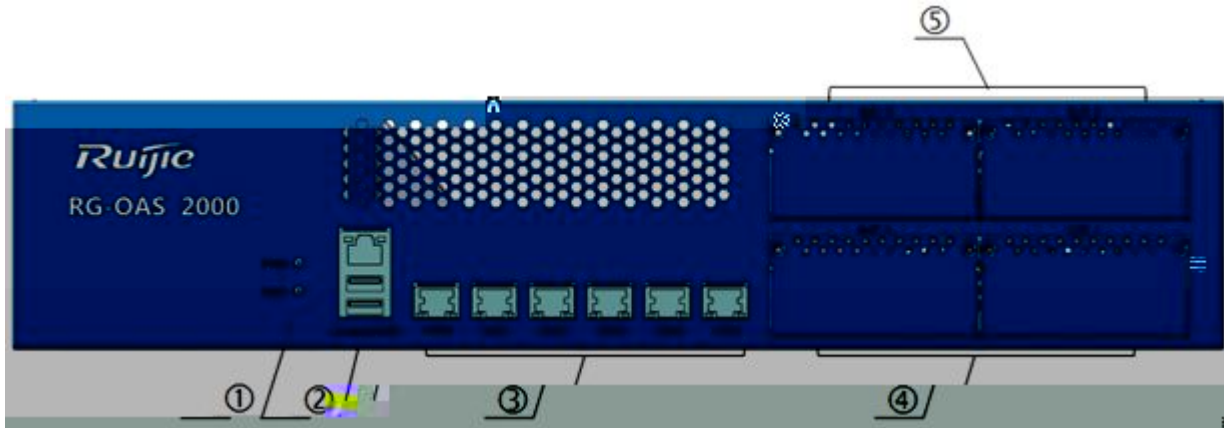


1-2



<5s

>=5s

	PWR		
	HDD		
		Link	10M
		Data	

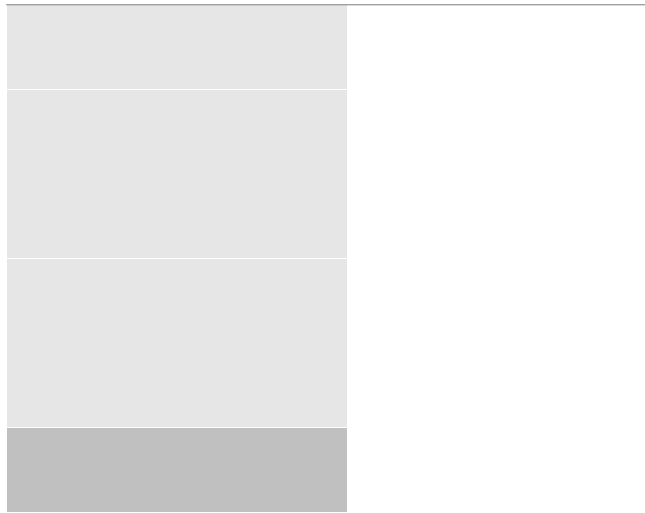

4-1

4-1





2 ID:ruijieupdate, 12345678 4-3

4-3



3 4-4

4-4




4 simp.fort.proxy.4.0.linux6.bin 4-5

4-5




2) admin, admin 4-9

4-9

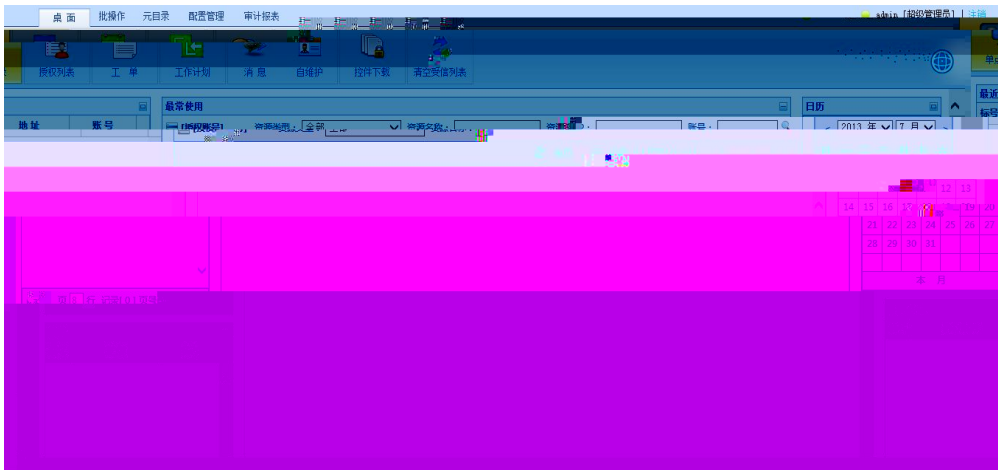


3) - - 4-10

4-10

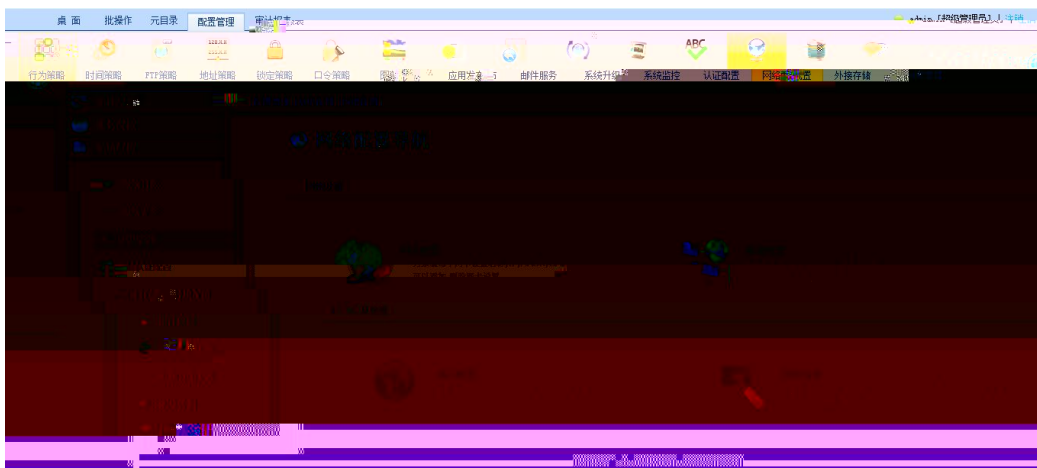

4) IP 4-11

4-11

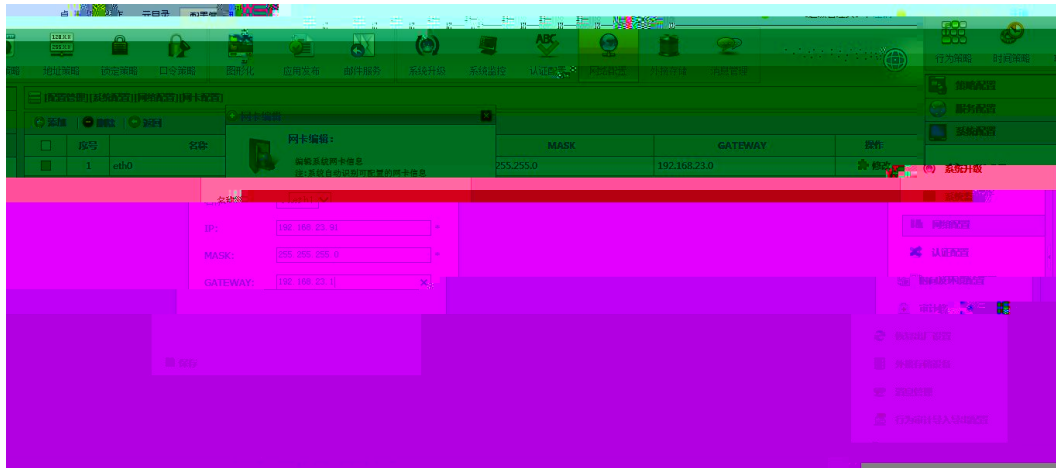

1 IP

<https://192.168.23.91>

4-12


4-12




2

admin, admin 4-13


4-13

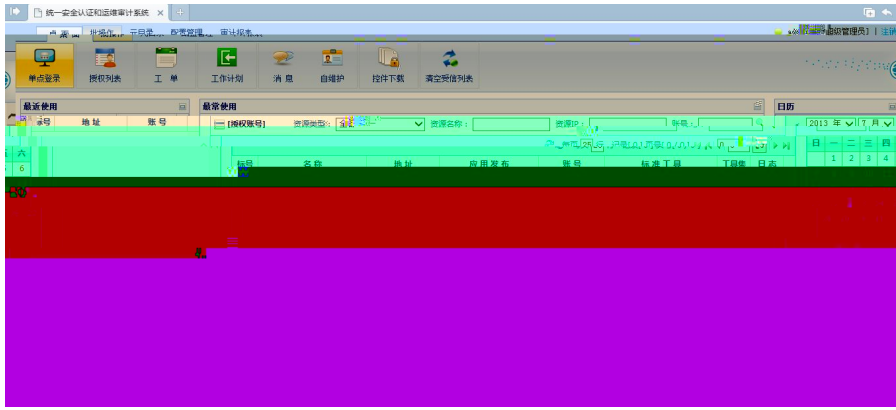

3 (¼ ñ ò ü é 6 ô

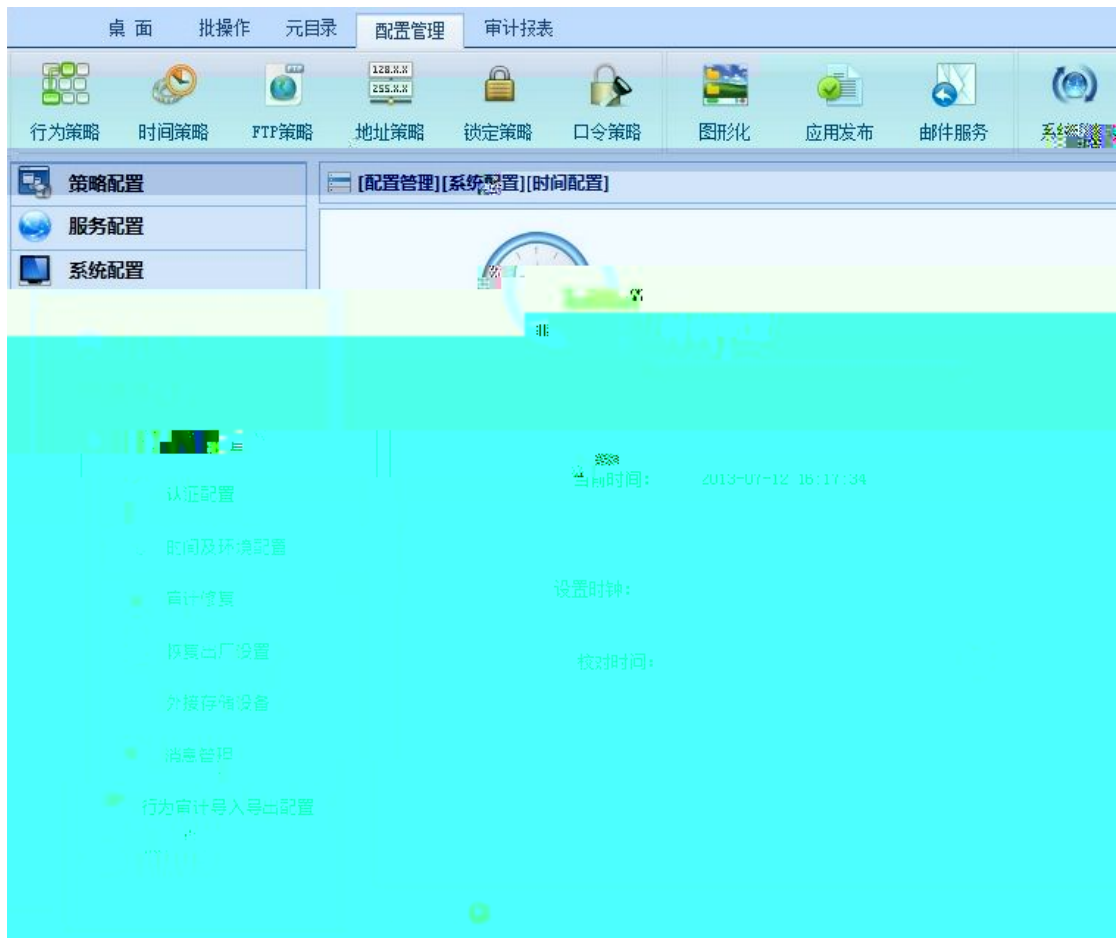

- power

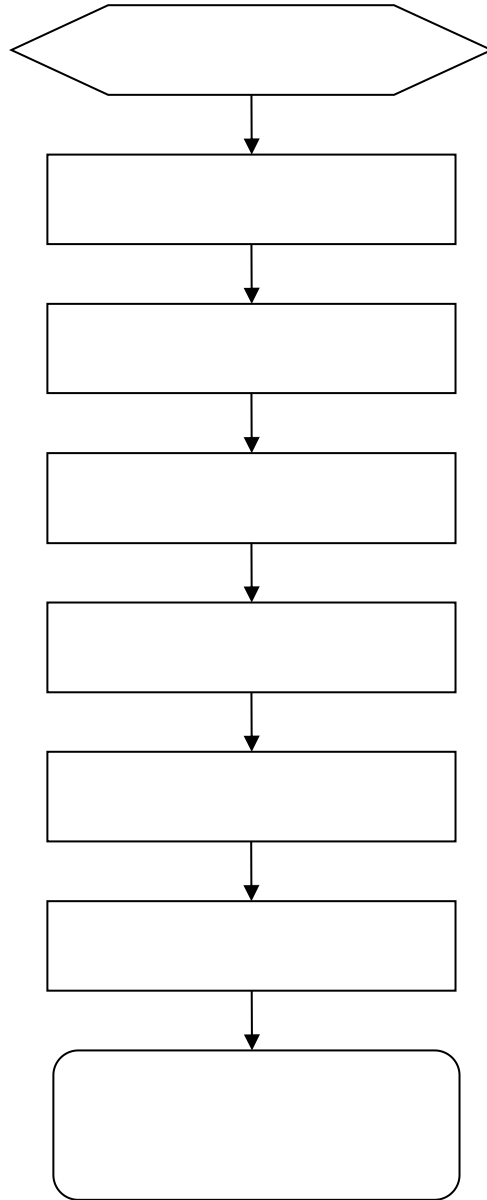

IP web

1 9600 8 1



2 ruijie ruijie

3 config ifa IP

\$ config ifa // IP

config interfaces

eth0 Link encap:Ethernet HWaddr 00:0b:ab:55:fa:60

inet addr:172.18.10.115 Bcast:172.18.10.255 Mask:255.255.255.0 // eth0 IP

inet6 addr: fe80::20b:abff:fe55:fa60/64 Scope:Link

UP BROADCAST RUNNING MULTICAST MTU:1500 Metric:1

RX packets:114426 errors:0 dropped:0 overruns:0 frame:0

TX packets:11843 errors:0 dropped:0 overruns:0 carrier:0

collisions:0 txqueuelen:1000

RX bytes:8675749 (8.2 MiB) TX bytes:9419377 (8.9 MiB)

Interrupt:23 Memory:fe7c0000-fe7e0000

eth1 Link encap:Ethernet HWaddr 00:0b:ab:55:fa:62

BROADCAST MULTICAST MTU:1500 Metric:1

