



©2013



RGOS®

RGNOS®

<http://www.ruijie.com.cn/>
<http://webchat.ruijie.com.cn>
<http://www.ruijie.com.cn/service.aspx>
4008-111-000
<http://support.ruijie.com.cn>
service@ruijie.com.cn

7× 24



RG-WALL 1600-M5

RG-WALL 1600-M5

RG-WALL 1600-M5

1.1 RG-WAI

	254 x 432 x 44 L * W * H mm 1RU
	100-240 VAC, 50-60 Hz
	110 V / 3 A, 220 V / 1.5 A
/	35.1W/38.7 W
	119.77 BTU/h

2

RG-WALL 1600-M5800E

2.1

2.1.1

2.1.2

2.1.3

2.2.3




2.2.7 EMI



3

RG-WALL 1600-M5800E

3.1

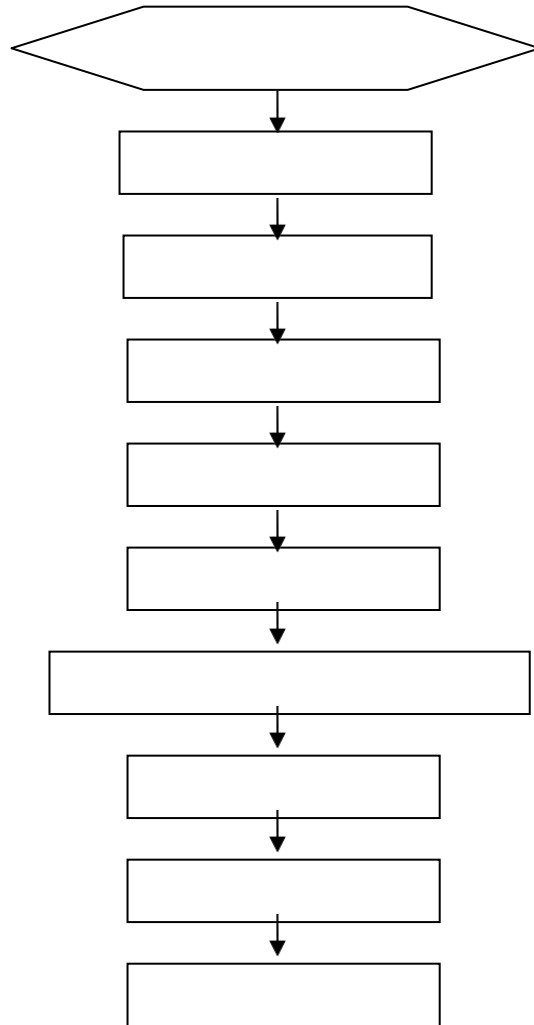

3.2

RG-WALL 1600-M5800E

3.3

5mm

1.5cm

- 1)
- 2)
- 3)
- 4)

1RU=44.45mm(1.75inch) IEC60297 19 1RU 3-1

RU Rack Unit


WALL1600-M5800E

RU

U

RG-

3-1

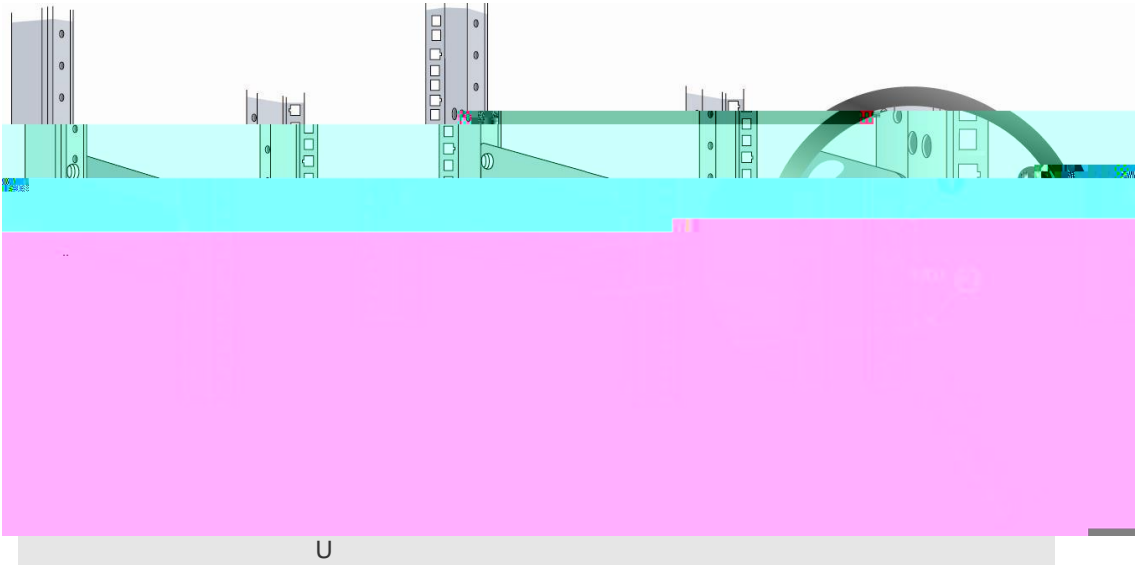

RG-WALL 1600-M5800E
M5800E

RG-WALL1600-

3.4

RG-WALL 1600-M5800E

10mm

- 1) RG-WALL 1600-M5800E
- 2) RG-WALL 1600-M5800E
- 3) RG-WALL 1600-M5800E RG-WALL 1600-M5800E

3.5

- 1)
- 2)
- 3) 16A
- 4)
- 5)

- 1)
- 2)

3

1.5

14AWG

3.6

- 1)
- 2)

- 1) RJ45
- 2) RJ45
- 3) RJ45
- 4)

3.7

- 1)
- 2)
- 3)

- 1)
- 2)
- 3)

3.8

- 1)
- 2)
- 3)
- 4)

- 1)
- 2)

- 1)
- 2)
- 3)

3.9

SFP

SFP

SFP

- 1)
- 2) SFP

3) 3-7 -

- 1.
2. SFP
- 3.
4. SFP
SFP


3-

4

4.1

Console


4-1

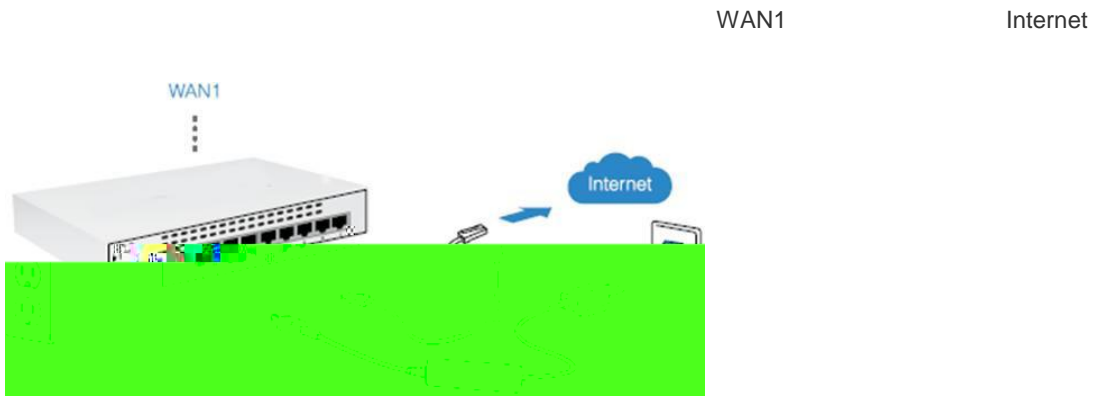

4-1

Web

admin LAN PC IP : <https://192.168.1.99>

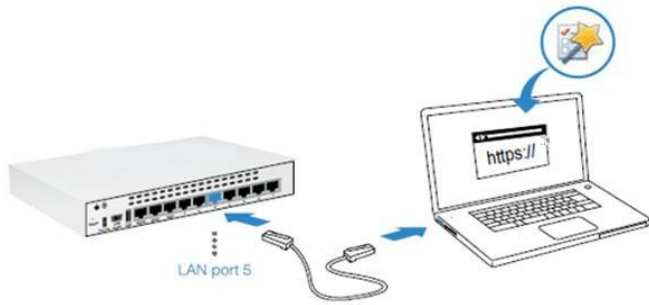

4-2

Console

PC

Console

a)

DB-9


PC

b)	RJ45			Console			
	1)	Console	USB	Console		Console	USB
	USB	PC					
	2)	PC		"			

d)

< >

4-7

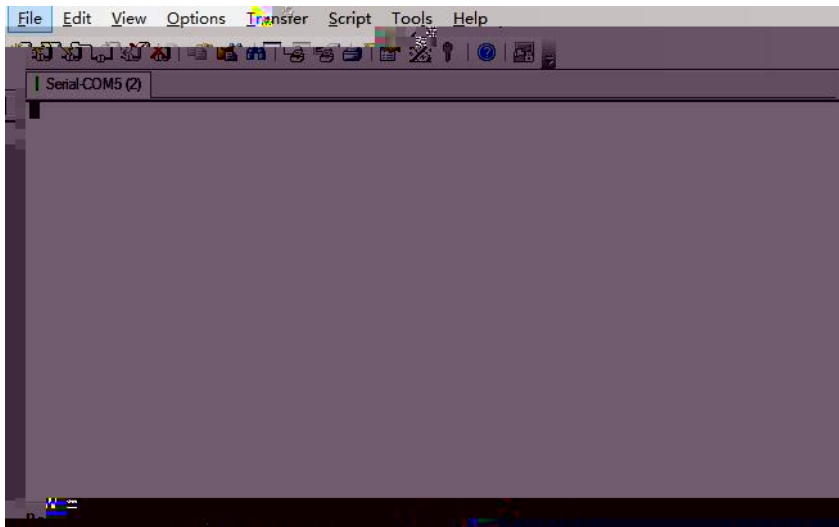

4-7

4.2

1)

2)

3)

4)

PC

1)


2)

5

5.1

RG-WALL 1600-M5800E

5-1 RG-WALL 1600-M5800E

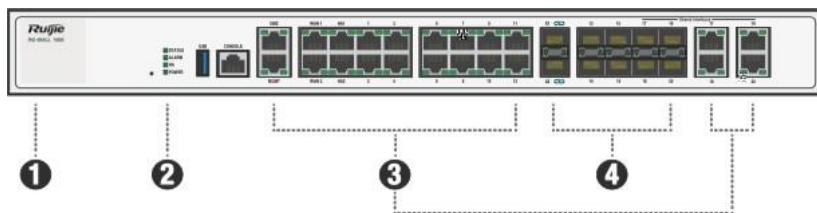

① LOGO


- ② STATUS
- 绿色: 正常
 - ◊ 绿色闪烁: 启动中

- ALARM
- 红色: 主要告警
 - 琥珀色: 低级别告警
 - 熄灭: 无告警

- HA
- 绿色: HA集群工作中
 - 熄灭: 没有加入HA集群

- POWER
- 绿色: 电源打开状态
 - Off: 电源关闭状态

③ 以太网接口 LINK/ACT

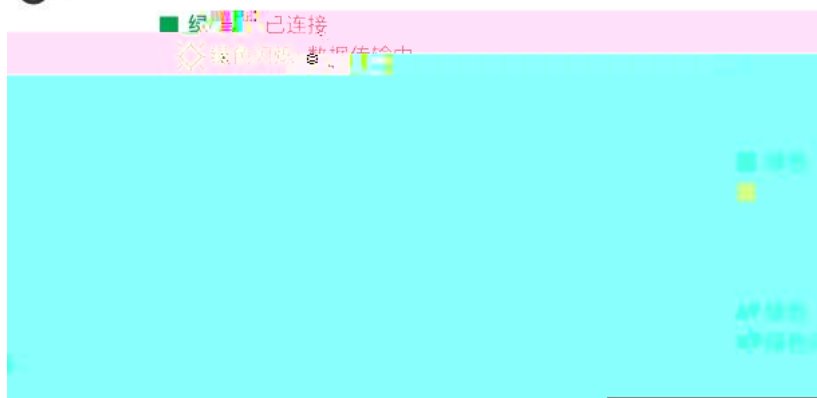

RG-WALL 1600-M5800E


RG-WALL 1600-M5800E
RG-WALL 1600-M5800E

RG-WALL 1600-M5800E

Internet
RG-WALL 1600-M5800E

Telnet

5.2

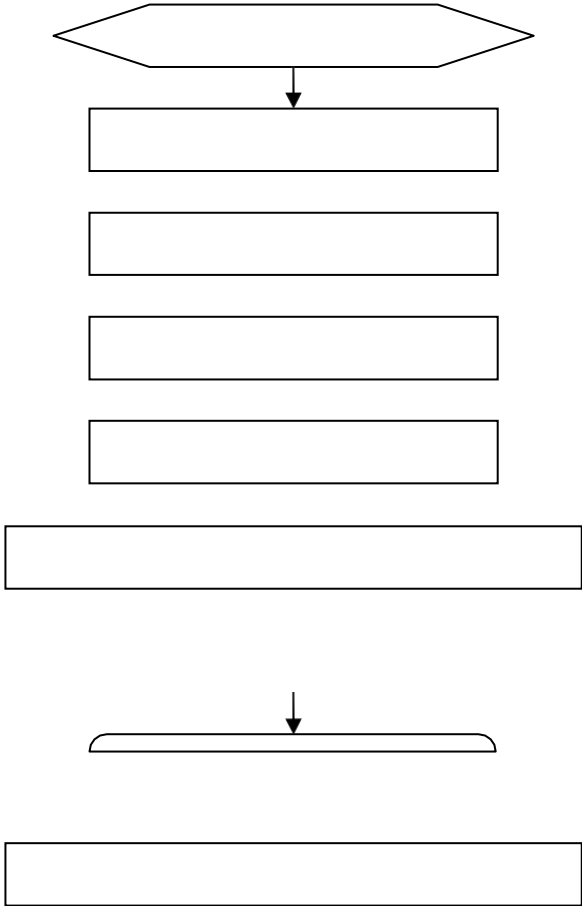

4

5 **link**

link

1

2

1310nm

1550nm

3

4

A


1000BASE-T/100BASE-TX/10BASE-T

1000BASE-T/100BASE-TX/10BASE-T

MDI/MDIX Crossover

1000BASE-T IEEE 802.3ab 100 1000BASE-T 4 100-ohm 5 5 4 UTP STP 1000BASE-T

A-1 1000BASE-T

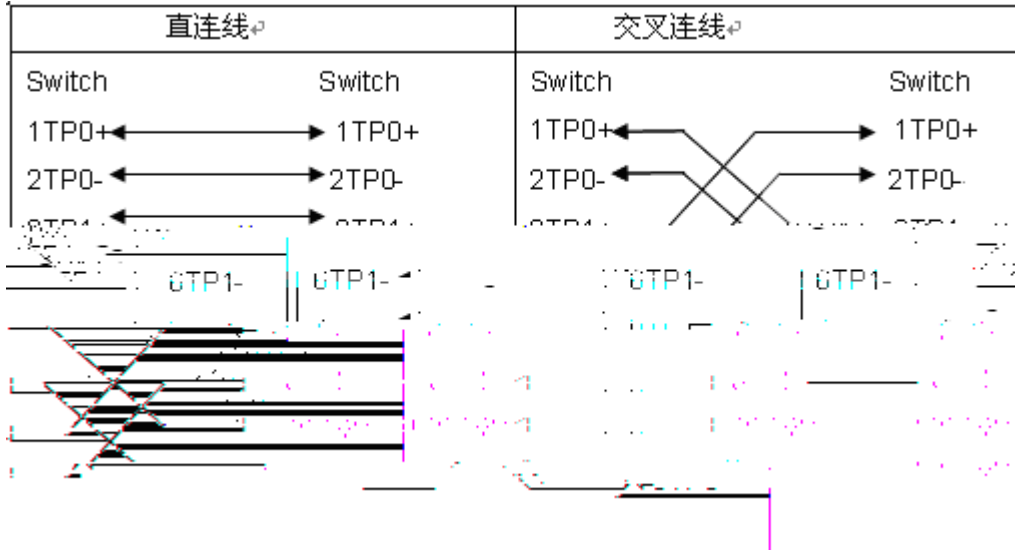

100BASE-TX/10BASE-T 100-ohm 5 100

10Mbps 100-ohm 3,4,5 100BASE-TX/10BASE-T

100Mbps

A-2 100BASE-TX/10BASE-T

Pin	插座	插头
1	Input Receive Data+	Output Transmit Data+
2	Input Receive Data-	Output Transmit Data-
3	Control/Receive Data+	Control/Transmit Data+
4	Control/Receive Data-	Control/Transmit Data-
5	4,5,7,8	Not Used
6		Not Used
7		Not Used
8		Not Used

100BASE-TX/10BASE-T

A-3 100BASE-TX/10BASE-T



16)

D-3

D-3

17)

18) 220V -48V

19)

- 21)
- 22)
- 23)
- 24)

mm	mm
10	80~150
10~30	150~200