


RG-IS2700G x æ V @ & ² C | À _



RG-IS2700G x æ V @ & ² C | O ”

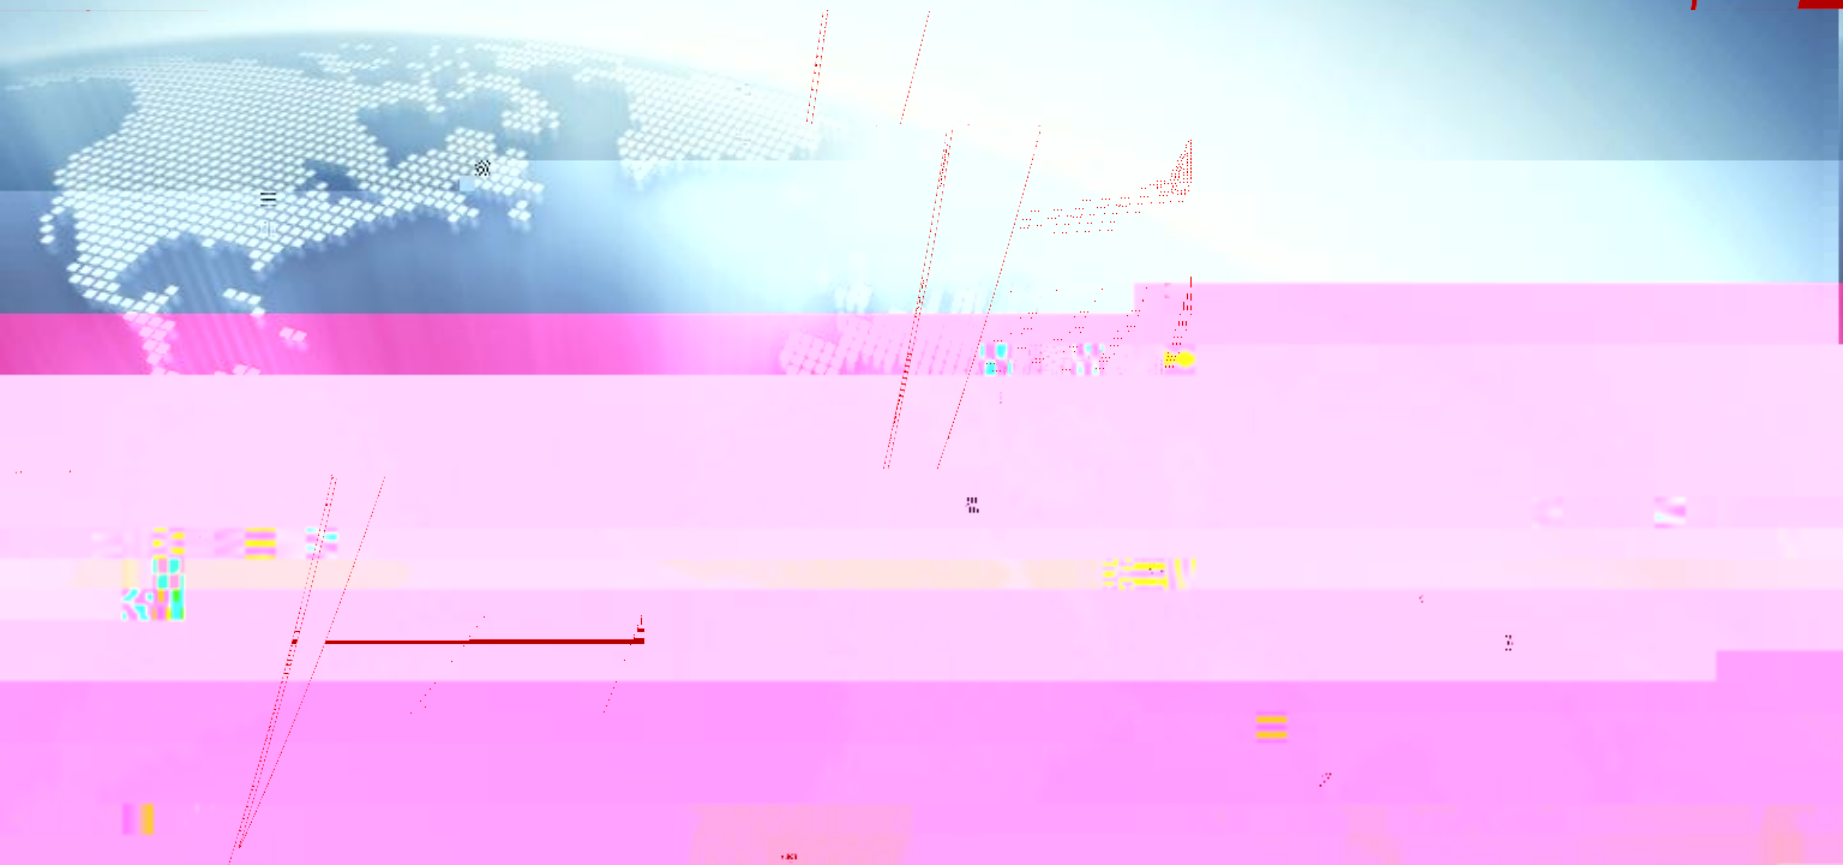

ù ç Contents





RG-IS2700G x æ V X P - @ & ²

; T f é] , % é µ π 4 ì , ³ 4 ì x é
Ã F x g • ° Ð Ð § 5 ;) ° Ê é „ Ð { - o ž

Ø, Ó - ñ 0 , @ ù) L , ³ û . . , V 3 , @ ù 6

Ž ũ Ā F g @ & ³ Ö 36G,
12 , .

高性能

主要
功能

高安全

高可靠

易管理

-40~85°C
IP40


>=6KV

Smartweb a Āo• V %• ? n x
ERPS ° - È ~ • ō ,20ms f ã & .

CPU • ō ê ±o• NFPP • x T Y
βo• f ACL x
°o• T DOS Y β W

ù ¢ Contents



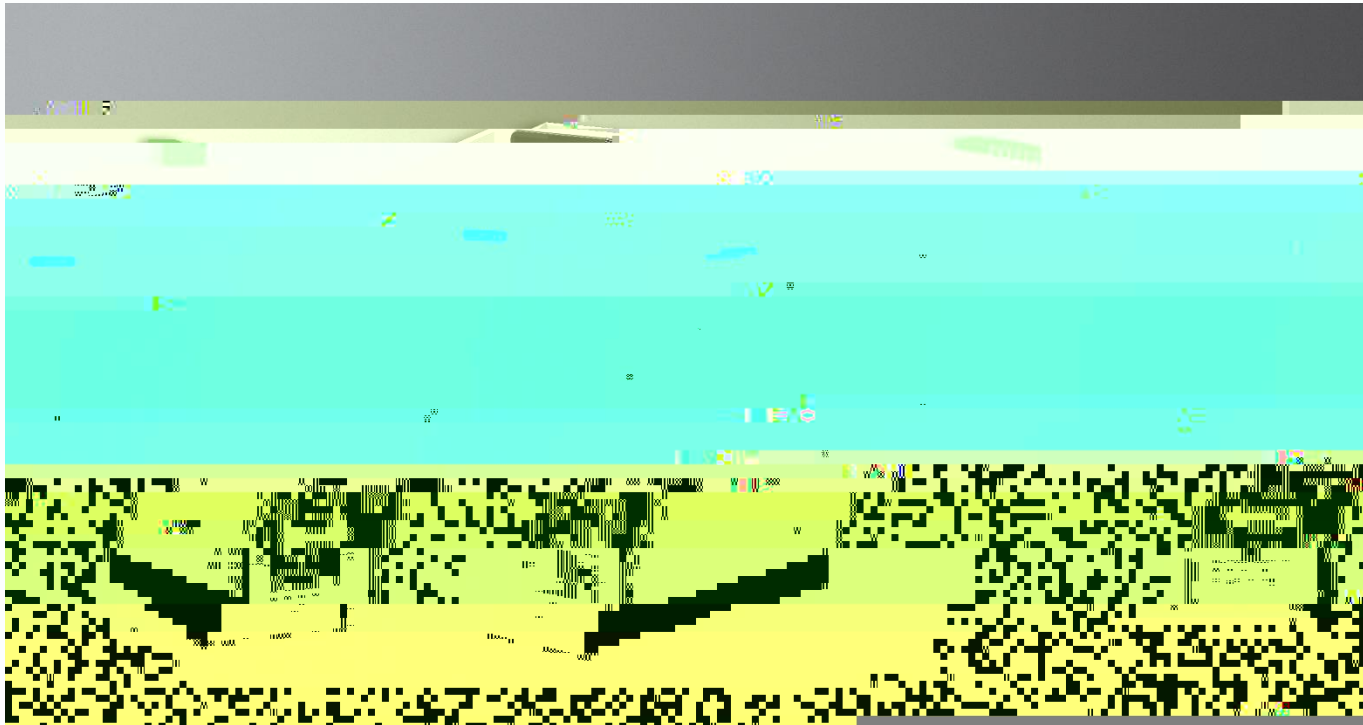

RG-IS2712G 8


4 SFP



RG-IS2706G 4

2 SFP

— IS2712G

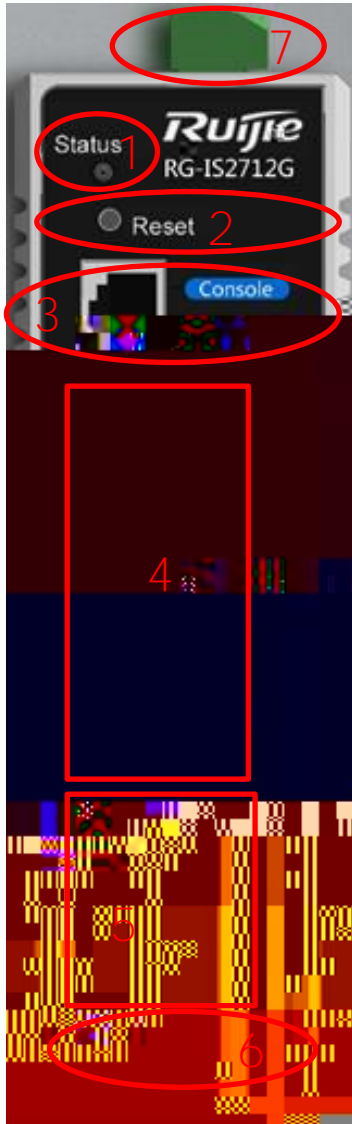

Reset


Console

8 10/100/1000Base-T

4 1000Base-X SFP /2.5G

1000Base-X SFP

— IS2706G

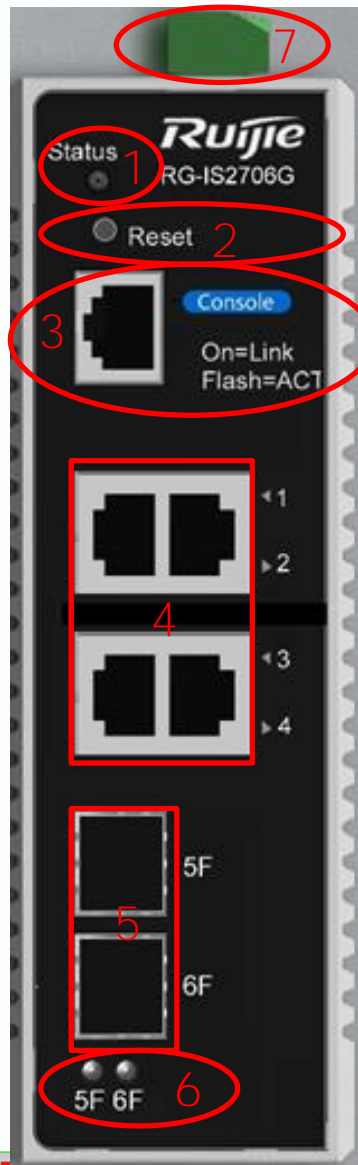

Reset


Console

4 10/100/1000Base-T

2 1000Base-X SFP /2.5G


1000Base-X SFP


— IS2712G&IS2706G

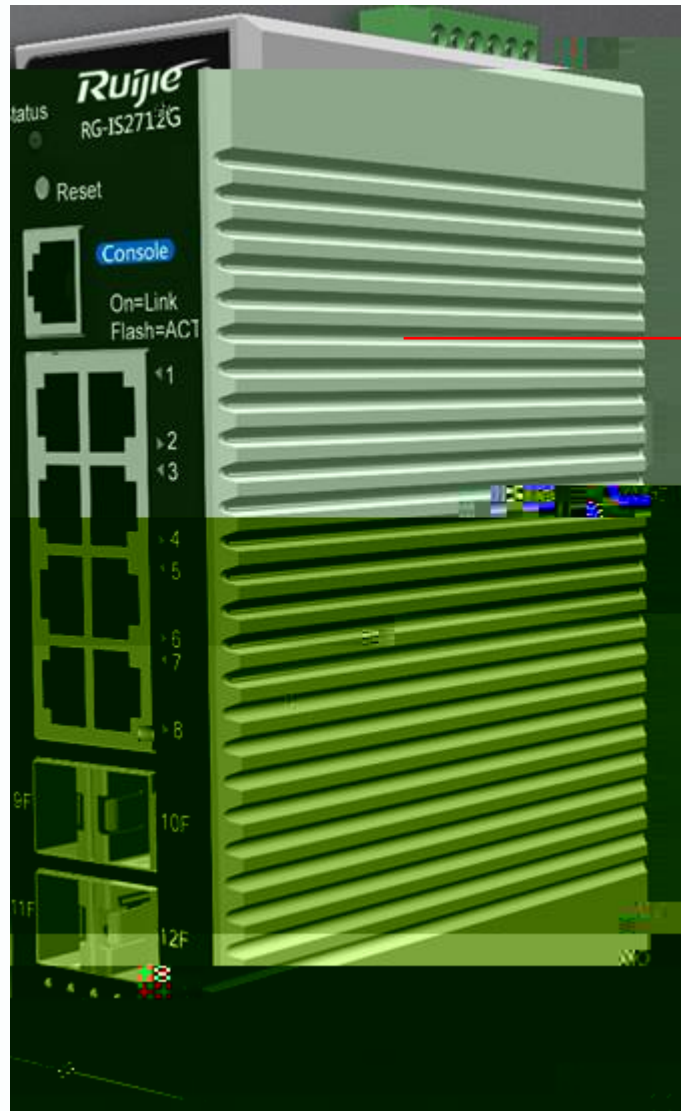

RG-IS2700G

10cm

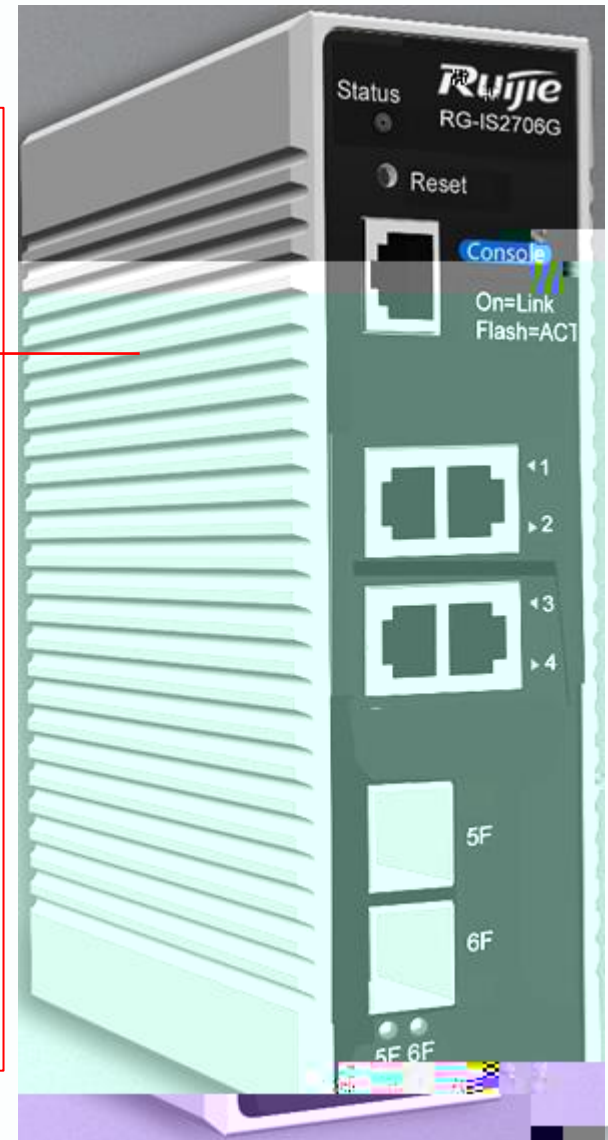

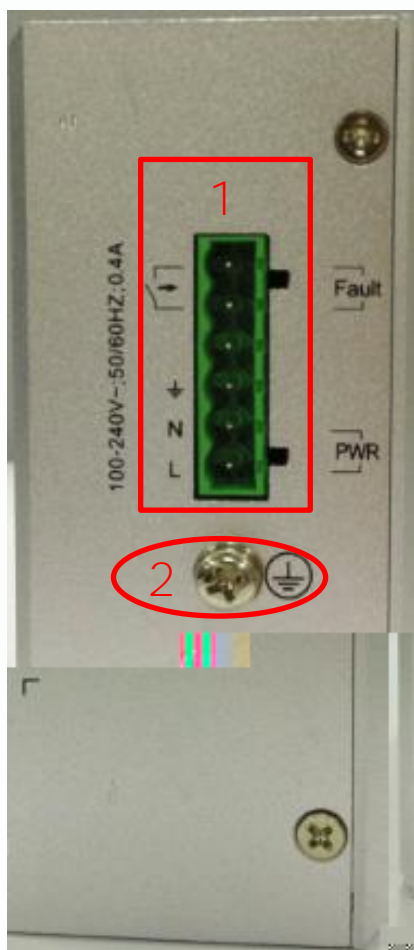

电源接口接线说明


L: 火线

N: 零线



100-240V AC



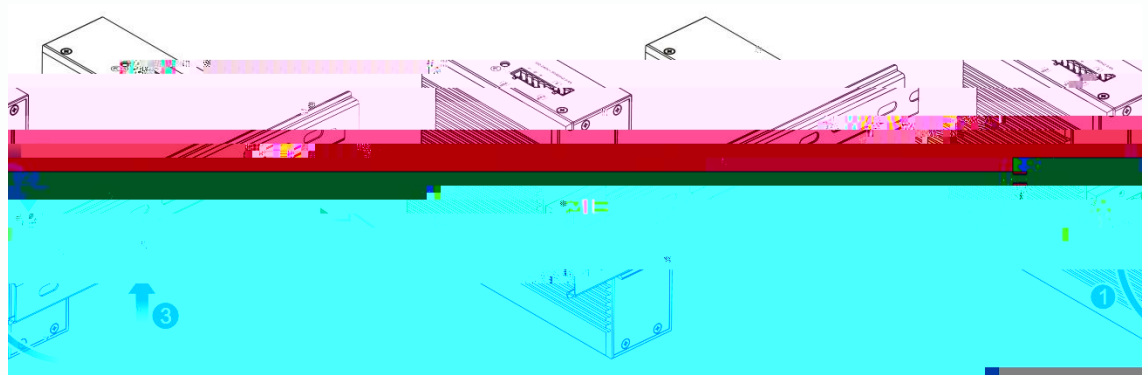


ù ¢ Contents





-30

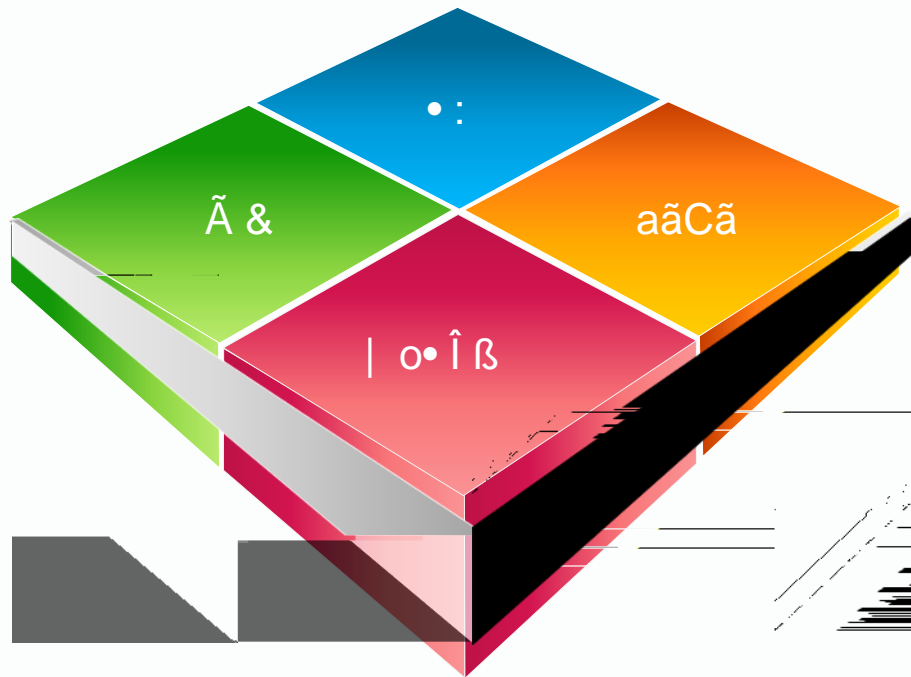



1

2

3

4

-20 60 -40 75

5


1588V2

6

(CE\FCC\UL)

IEC61850 EN50155

7

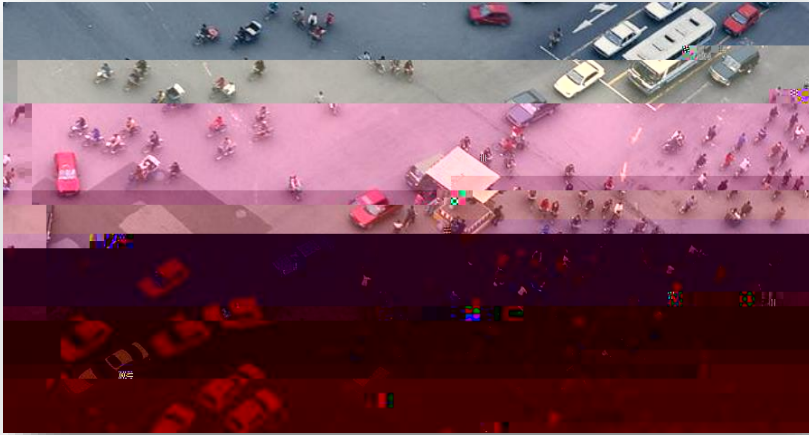


• x @ ù a ' { -




3 û . . a ' { - u

ERPS

JC

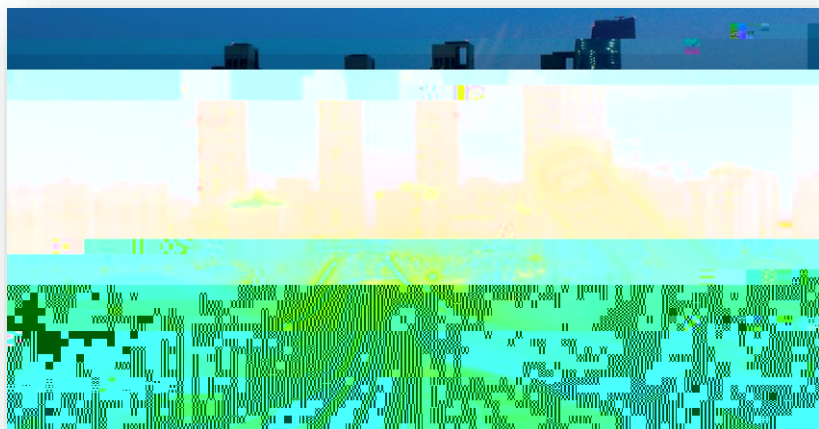

t ¼` u

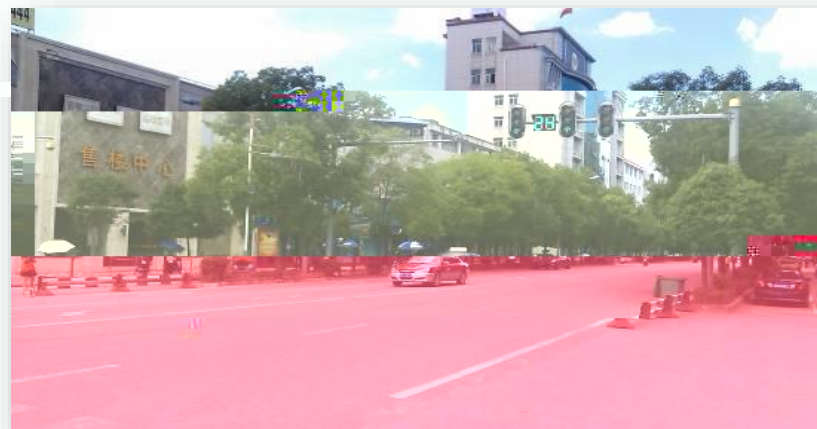

IT

JC



t Ù ñ 0 / ' /



R ð ñ 0 / ' /



ï C ñ 0 / ' /



P ' L ñ 0



€ Đ a ‘

AP

n Đ x

VLAN

IP

q å ¢C⁻ u

1. S5750-24SFP/8GT-S
- 2.



€ D a ‘


AP

n D x
ERPS

ù ¢ Contents



VS



“ www.ruijie.com.cn ”

“ www.ruijie.com.cn/service.aspx ”

“ support.ruijie.com.cn ”

“ webchat.ruijie.com.cn ”

“ 4008-111-000 ”