





```

WS18000-1B11#show ac-config client in mu
===== show sta status =====
AP      : ap name/radio id
State   : Stand/Recon/Exe/Work Mode/Reinit/State/MU, MTKO, E-Auth, Power Save, D-Auth, Disable Power Save
-----
Total Sta Num : 39
STA MAC      IPV4 Address  AP      wlan vlan status  Asso Auth  Net Auth  Up time
-----
F48b.32a3.04e3  temp/2          6  1731  9.0M/E/ac/R/mu  MAB        WEB        0:20:37:33
WS18000-1B11#

```


第三频

mu终端

```


WS18000-1B11#show ac-config client in mu
===== show sta status =====
AP      : ap name/radio id
State   : Stand/Recon/Exe/Work Mode/Reinit/State/MU, MTKO, E-Auth, Power Save, D-Auth, Disable Power Save
-----
Total Sta Num : 39
STA MAC      IPV4 Address  AP      wlan vlan status  Asso Auth  Net Auth  Up time
-----
F48b.32a3.04e3  temp/2          6  1731  9.0M/E/ac/R/mu  MAB        WEB        0:20:37:33
WS18000-1B11#

```

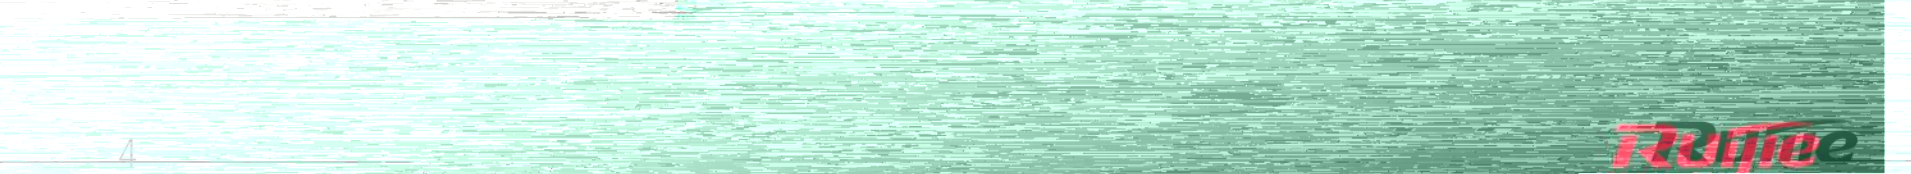





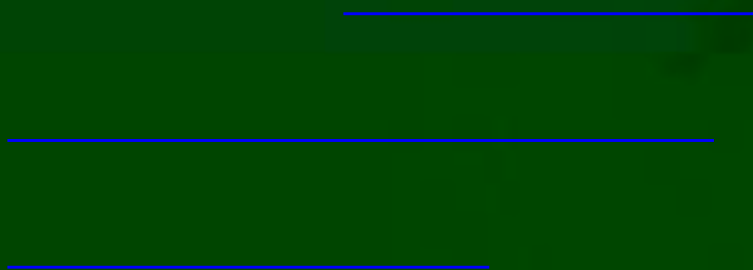

7kuilje 7kuilje

7kuilje 7kuilje

