



€ M v ! F å

€ M ü ` F å


à ì ± <sup>TM</sup> F å

VSU Z ' F å

F å

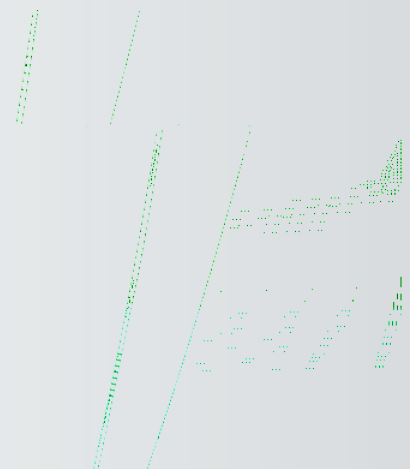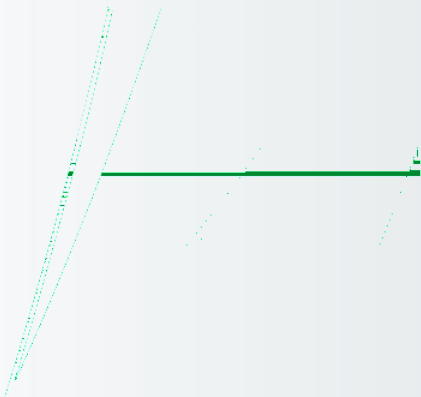


# € M v i F å

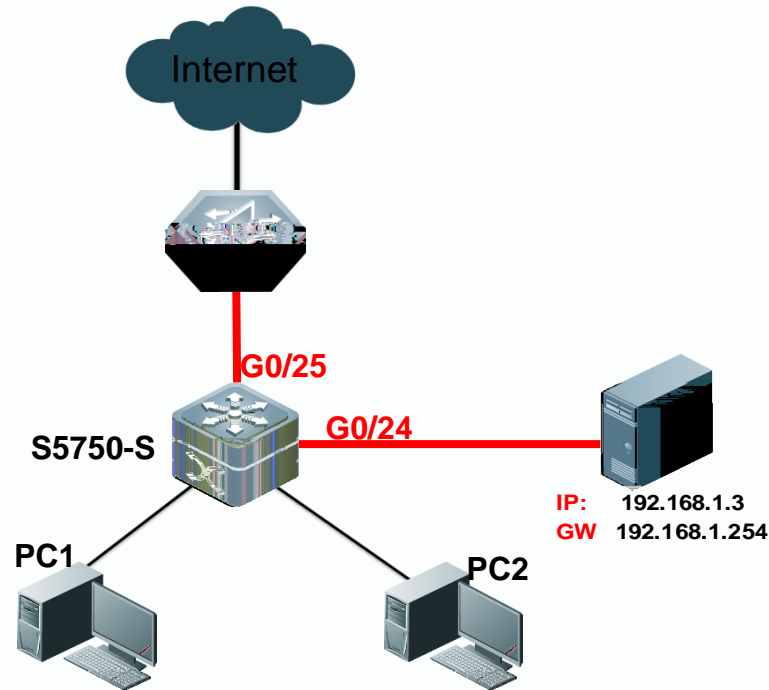

î à l 7 Á • ¬ } S + ñ Ä à v O g < “ £ k 7 Á , B } L ” p  
¶ A E Ñ µ B æ 4 % ² V y ! O Æ ~ k ¬ } A E Ñ • o € M v i k 1  
û M g N è ~ € M h µ • g C ß • g f G g i à ñ Ä v O h C  
v i ñ ¥ Æ ~ ñ N € M Û k Ç Æ ~ ÿ < “ £ o ž ” £ ª P / ¬  
} G 0 / 2 5 M f G v i ñ G 0 / 2 4 M o ž c ž ¥ ! O Æ ~ ¬ } à o ž



# | € M v ! F å

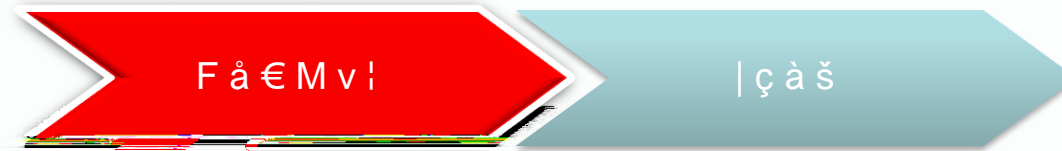


```
Ruijie>enable
```

```
Ruijie#configure terminal
```

```
Ruijie(config)#monitor session 1 source interface gigabitEthernet 0/25 both ----->
```


# | € M v ! F å

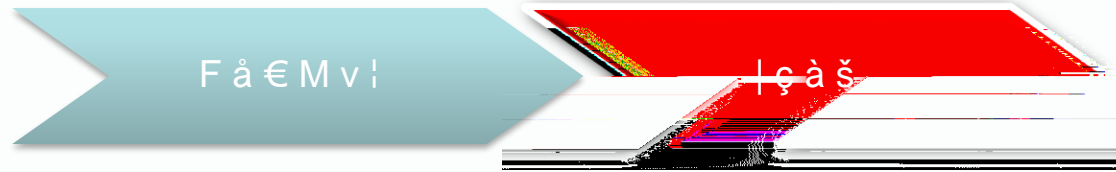

1 h ò 0 € M v ! Ù Á

```
Ruijie#show monitor -----> ò 0 € M v ! Ù Á
sess-num: 1 -----> session Z 1
span-type: LOCAL_SPAN -----> F å © Í A E Ñ v !
src-intf:
GigabitEthernet 0/25 frame-type Both -----> v ! > € M G0/25 ÿ µ ÿ ß E g f G
dest-intf:
GigabitEthernet 0/24 -----> v ! ) € M
mtp_switch on -----> v ! ) € M Î ï - ô G \ f G k ë à
```

2 h G • ! O Æ ~ © k Ü ~ | Ù à

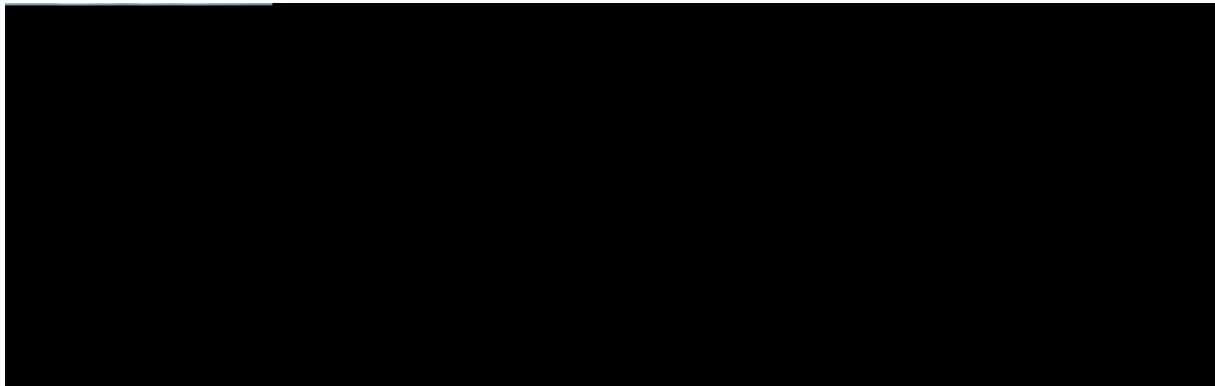



€ M v ! F å

€ M ü ` F å


à ! ± <sup>TM</sup> F å

VSU Z '

F å

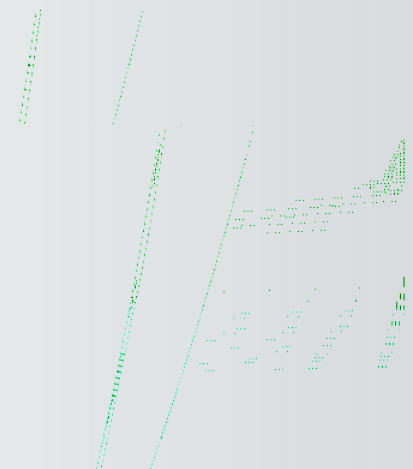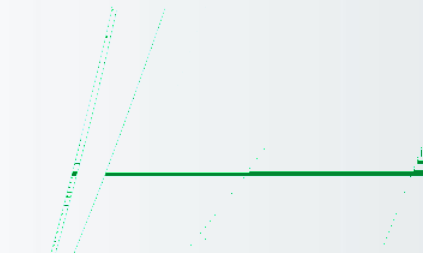

# € M ü ` F å

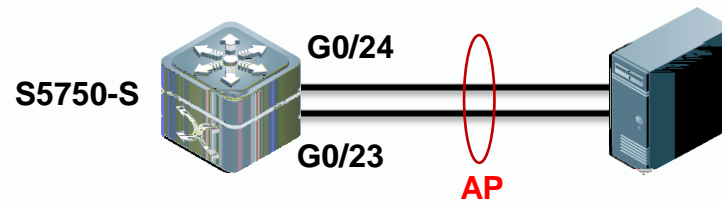

î à l i J S5750-S A E Ñ • p ¶ k 9 à l í 4 Y O • k + —  
& Æ ~ k ! ¬ L • í k ä Q Ê U ñ 1.5G k = Û 1000M e è ] Æ —  
c á ¬ L 4 o ž e È \* — & Æ ~ E à \* Y ? Ç k A E Ñ € M ü ` Ð k  
ë 2G k ! k á i ½ , ~ | Æ ~ ¬ L o ž E e è ü ` U Y U ^ É  
• Ö a k ... 2 % µ { ž o ž


| € M ü ` F å

é [ U Y Ú Ò ò € M ? Ç " % ^ Ü ¥ è % ^ . p € M k . p € M é [ f \$  
Aggregate Port

# | €Mü`Få

- ' €Mü` ètKÅ·À%² k ,NM,äo•EWkPÅ•°g6°Mêñ M  
h^z
- “ 8C€MQ µ8C APk C€MQ µ C APk]Æ¼û4ètM AP  
M<sup>a</sup>•wJ8C / CKÅz
- ” €Mü`ekètNM %PÇ gFåkQ ” APMFåñ¬} g  
interface aggregateport x/x hz
- ;û—Õ €Mü`%”·À%² kw c%²ž~Q #+%²\_k©²Áü`  
êñ© Á LACP ü`ož

# € M ü ` F å

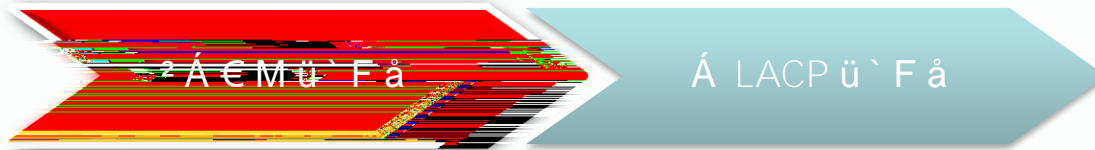

```
ruijie(config)#interface aggregateport 1
ruijie(config-if-AggregatePort 1)#switchport
ruijie(config-if-AggregatePort 1)#exit
ruijie(config)#interface gi0/23
ruijie(config-if-GigabitEthernet 0/23)#port-group 1
ruijie(config-if-GigabitEthernet 0/23)#exit
ruijie(config)#interface gi0/24
ruijie(config-if-GigabitEthernet 0/24)#port-group 1
ruijie(config-if-GigabitEthernet 0/24)#end
```

ë • ü ` Á AP1 k K Á  
access vlan 201

1 Ž Ò ò € M µ c %² ü  
` Á AP1

ò 0 ü ` Á AP1 NM  
' î


```
ruijie#show interfaces aggregateport 1
AggregatePort 1 is UP , line p
Hardware is Aggregate Link Ag
Interface address is: no ip addre
MTU 1500 bytes, BW 2000000 Kbit
----- . B ã ' Î ----->
Members: (count=2)
GigabitEthernet 0/23
GigabitEthernet 0/24
```

2 @ M ü ` e AP1 k  
! è 2G

ü ` è e NM © up Û  
Á k k é © down

Link Status: Up  
Link Status: Up

# € M ü ` F å

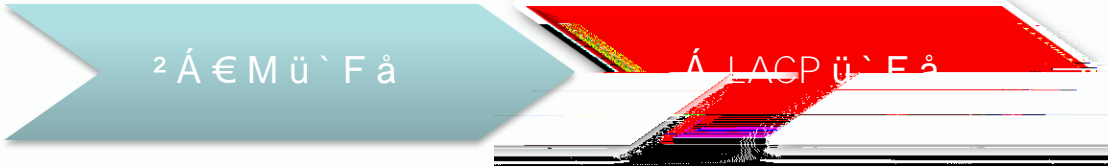

```
Ruijie# configure terminal
ruijie(config)#interface aggregateport
ruijie(config-if-AggregatePort 3)#switc
ruijie(config-if-AggregatePort 3)#exit
Ruijie(config)# lacp system-priority 4096
Ruijie(config)# interface range GigabitEthernet
Ruijie(config-if-range)# lacp port-priority 4096
Ruijie(config-if-range)# port-group 3 mode active
Ruijie(config-if-range)# end
```

(U#) F åž LACP © Ī i ĩ k  
9Đ € M Ü Á k > P 4 P i ĩ k Ó •  
i ĩ 32768

g € M μ ü ` Á w 6 € M 9 A € ` %  
" k active n P € M Y % " μ k  
passive n P € M Y t % " μ k · Á '  
š — Ö • 5 Ä %² active € M

```
Ruijie#show lacp summary
Aggregate port 3:
```

## Local information:

Port	Flags	State	Priority	Oper Key	Port Number	Port State
Gi0/23	SA	bndl	4096	0x3	0x17	0x3d
Gi0/24	SA	bndl	4096	0x3	0x18	0x3d

Partner information:

<----- . ----->



€ M v ! F å

€ M ü ` F å


à ! ± <sup>TM</sup> F å

VSU Z '

F å

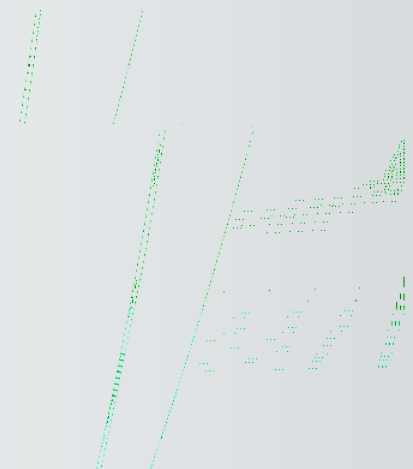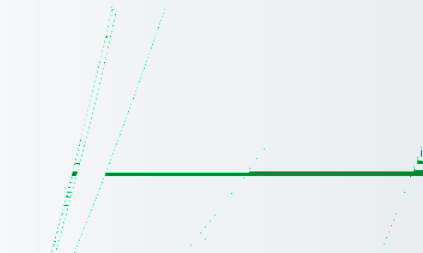

# à ì ± ™ F à

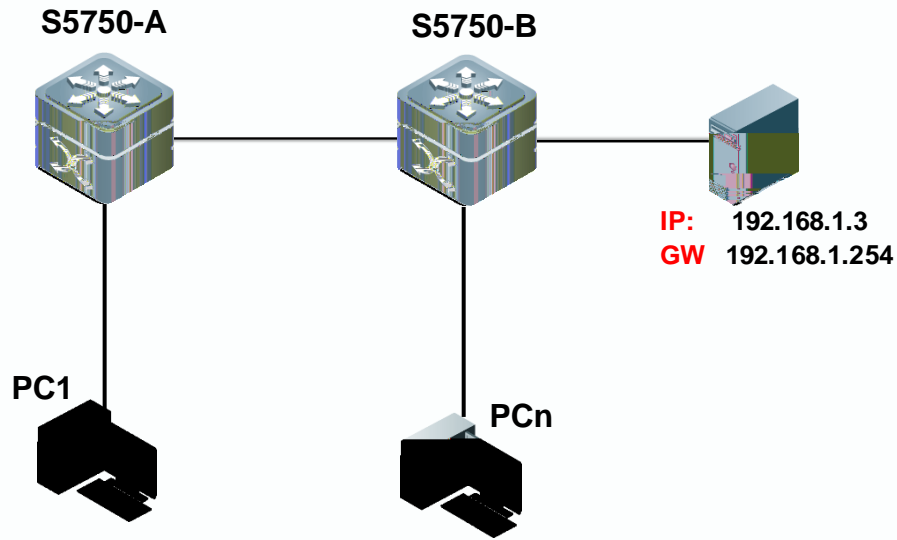

XX à J V S5750-S 'ûÁàk\* ûÝ~ ÷^•J~ ož à  
 Á•ìÊk¬}\* àì± ™ È³ 100 V Ÿ©Ïkà ±Æ ~ \_  
 C+N N"AEÑ\_€M k¬} ëU[\$• àìcnk©Ï± ™ |ç  
 ožeÊ ¬}F`zn" ûÝ~ ÷^ g~ t ož

# I à ì ± ™ F å


à ì ± ™ UY+ ò † \* à ì g ghost q • k z d 9 à lo • à ì  
à k ÚV y Ń c ž x q • © Ĭ o ž à ± } © J z n ¥ ” g f G  
ô G k û L o • • 3 o • û Ý ^ z n ” ~ ÷ ^ © Ĭ - K 9 à ± %² \_ • u •  
o ž

' ¼ { ñ Ä € M z n Î ° O ò  
“ ¼ { ñ Ä € M Á n Î ° O ò  
” ¼ { ñ Ä € M v O

V S5750-S A E Ñ

h C } F å ¼ { z n o • Á n Î ° O ò k ¼ { v O

# 1 à ±™ F à

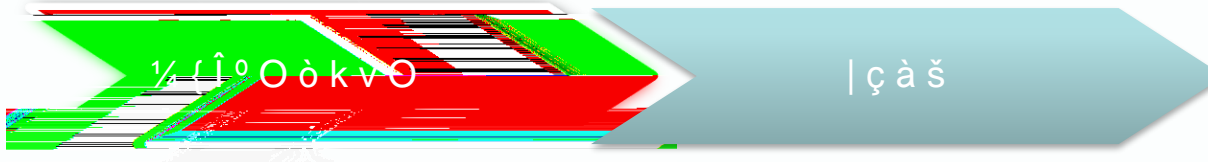

```
S5750-A#conf terminal
S5750-A(config)#interface range gi0/1-24
S5750-A(config-if-range)#no storm-control broadcast
S5750-A(config-if-range)#no storm-control multicast
S5750-A(config-if-range)#flowcontrol off
S5750-A(config-if-range)#end
S5750-A#write
```

```
S5750-B#conf terminal
S5750-B(config)#interface range gi0/1-24
S5750-B(config-if-range)#no storm-control broadcast
S5750-B(config-if
```

# I à î ± ™ F å



```
ruijie#show storm-control
```

```
Interface          Broadcast Control Multicast Control Unicast Control Action
```

```
-----  
GigabitEthernetTm0 g0 G 0.00468 Tc[(-----004A(79(rn)/as)-1 )22BT/F6 14.04 Tf1 0 0 1 78.048 339.29 *
```



**RUIHE**

www.ruihe.com.cn

www.ruihe.com.cn

# | VSU Z' F å

XX à l g à l ' k J Æ 4 é [%² V RG-S5750-48GT/4SFP-S k V RG-  
S5750-24GT/8SFP-S — Õ k Á • VSU ® Z' ê ào ž ¶ ® N µ ñ µ PC k  
đ € M ° ² û HUB ý J ® € Mo ž E ® û ß M è ~ k c ž à l Ä B ® Æ  
~ U ^ — & o k § k • ç ^ Æ o ž V A E Ñ Á • è ® N µ k ® ; û  
• 8 C ä , N µ à ì k ¶ µ U e è k ! k ï à } à k c ž VSU k Û • Ž o •  
α " ' ò U × 5 Ó O o ž

# | VSU Z' F å

VSU Đ©%² \_Ny1 Z' Đk 1 ÚV Òò — Õ Z' è %² V . p — Õ k  
? Òò — Õ " ' ò µy ô G µĩ %² n ë %² V — Õ ož R ò † a k UY1 VSU ,

# | VSU Z' F å

VSU Đ } u 4 ò y ½ Ä Lo• ½ Ö ao• 'o•' ò M go• E Ñ y

½ Ä Ly" VSU © ĩ g i k<sup>a</sup>• è t— Ö Á µ y ß ož

½ Ö ay Ñ y R Ñ \$• Ä ½ Ö a k Ñ { ž k- ...

VSU © ĩ { ž ož

| VSU Z' F å

# VSU Z' F å



h P y S5750-S © ç web F å µ © — c F å VSU ä ´ Ô Å , ¼ k ñ Y  
 k - G ´ Å Ñ console M , ¼ q •



ò ÷ ^ í î g show version h k G • \_ A E Ñ k • Ê ÷ ^ í  
 Î u 4 VSU k - - ´ ÷ ^

Y V S5750-S © ç A E Ñ Á • VSU † k 5 - } \_ F ý J % ^ 2 k  
 % ^ 2 k A ^

— Õ • Õ Ñ k 7 Á • £ P k x ® ý J % ^ 2 k ° % ^ 2 k — Õ ; û k ä • ñ Ò ò C µ VSU ê  
 • • ê è k ß 4 q F å ž g ì F å VSU h k A E Ñ N è ê à " ÷ e k D ÿ ê è k

G • — " e k 1 3 V — Õ

Slave y RG-S5750-24GT/8SFP-S TE2/2 Master y RG-S5750-48GT/4SFP-S TE2/1

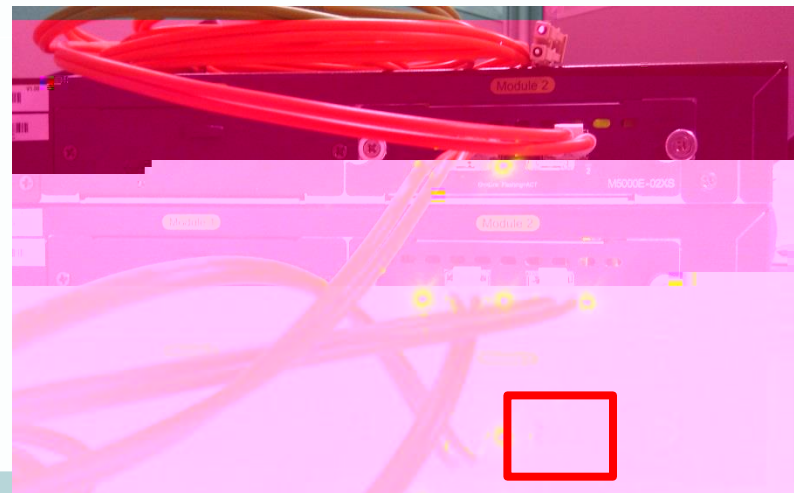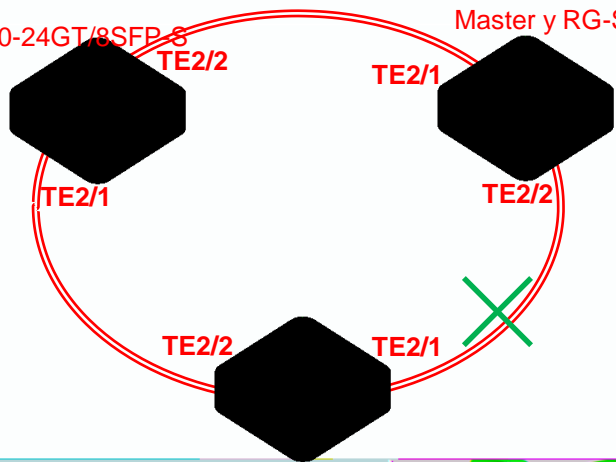

# | VSU Z' F å

## Master RG-S5750-48GT/4SFP-S

```
Ruijie#config terminal
Ruijie(config)#
Ruijie(config)#switch virtual domain 1
Ruijie(config-vs-domain)# switch 1
Ruijie(config-vs-domain)# switch 1 priority 150
Ruijie(config-vs-domain)# exit
Ruijie(config)# vsl-aggregateport 1
Ruijie(config-vsl-ap-1)# port-member interface tenGigabitEthernet 2/1 fiber
Ruijie(config-vsl-ap-1)# exit
Ruijie(config)# vsl-aggregateport 2
Ruijie(config-vsl-ap-2)# port-member interface tenGigabitEthernet 2/2 fiber
Ruijie(config-vsl-ap-2)# end
Ruijie#
```

```
Ruijie#show switch virtual config
switch_id: 1 (mac: 1414.4b5b.6e70)
!
```

# VSU Z' F å



Ä F å ñ V A E Ñ %2 ( ä E W • % " ñ VSU % " k p µ × x X e A E Ñ 1 Ö a % Ñ % " F å k = Ä F å Ç Ÿ | ) è e k VSU / U • y h k Ä

Ruijie#switch convert mode virtual  
 Convert switch mode will automatically backup the "config.text" file and save it, and reload the switch. Do you want to convert switch to virtual mode? [no/yes]yes

System bootstrap ...

ü g show switch virtual • show switch virtual topology • show switch virtual link  
 • show switch virtual config ò VSU ù Á

Ruijie#show switch virtual

Switch_id	Domain_id	Priority	Status
1(1)	1(1)	150(150)	OK ACTIVE
2(2)	1(1)	120(120)	OK STANDBY
3(3)	1(1)	100(100)	OK CANDIDATE

Active ©VSU Ñ k ò ç ...  
 Console M ´ ò y F å A E Ñ k  
 • N ñ V k ç U A E Ñ  
 Console k > a

Ruijie#show switch virtual topology  
 Introduction: '[num]' means switch

U Y ò 0 ñ V S L e è ©  
 ò ~ N



means vsl-aggregateport num.

Ring Topology:  
 [1](1/1)---(2/2)[2](2/1)---(3/2)[3](3/1)---(1/2)[1]

Switch[1]: ACTIVE, MAC: 1414.4b5b.6e70, Description:  
 Switch[2]: STANDBY, MAC: 1414.4b5a.18d4, Description:  
 Switch[3]: CANDIDATE, MAC: 1414.4b5a.198c, Description:

# VSU Z' F å

9 VSU © ĩ \_ è t — Õ F å C © , c k Ñ Ê c 5 o ž VSU © ĩ ø  
VSL • ž U D ÿ E Ñ | Ê k / à ì ß ë Á F å % ² ý A E Ñ k 1 -  
IP<sup>a</sup> - ĩ s o • ô G • ^ | Ê  
“ ¿ Á Á à % ° L • J % ² Ú VSL < k D ÿ E Ñ k ê ¥ Á à • J Ú VSL k D ÿ  
E Ñ

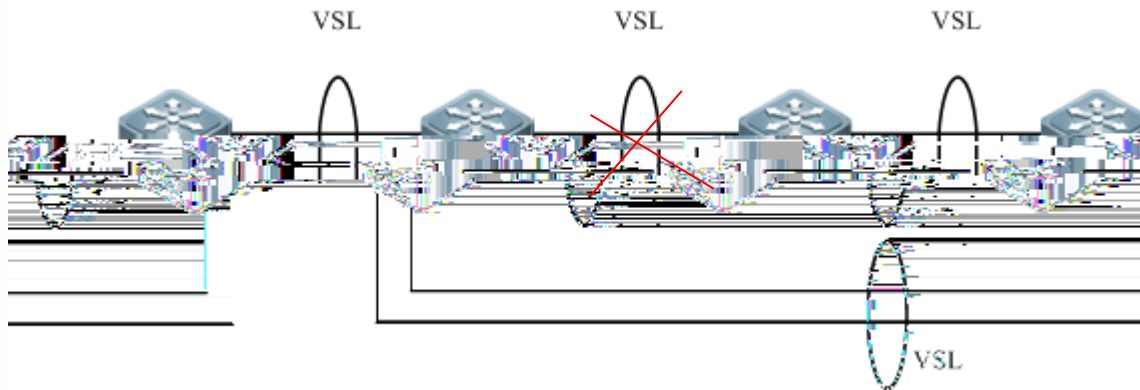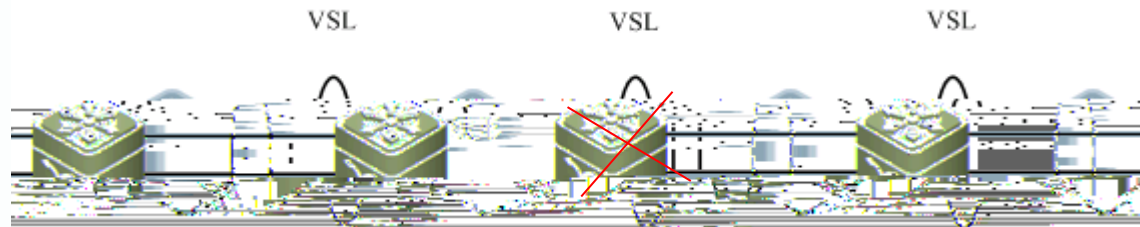

# | VSU Z' F å

BæE Ñ y ekç VSL •DÿE Ñžk¥ 1 X ¿ %² Á—Ö  
Y¿g ¥Á—Ö ñÄ€M1t shutdown hk'sàì3oW•ož  
E Ñ y ©U#Fåk }©" VSL eè•wžÜ• k" Ž¾) P<  
Bæož  
S5750-S©çu4 \_E Ñ y Đy BFD yMAD  
BFD →"AEÑ N BFD eègAò ®àMhk) AEÑ€M  
MAD →} ûêñ ûAEÑ©iHAEÑk→u4 DAD Relay [10.4(3b16  
hC10.4 g3b17

# VSU Z' F å

BFD E Ñ y F å 5 â  
9 Î) « ° VSU ; û > D — Ö C © i H A E Ñ ê ñ © u 4 DAD relay k ñ Y é [  
J BFD • ” y E Ñ

```
Ruijie#configure terminal
Ruijie(config)#interface gi2/0/20 // F å y N M 1 è Mož
Ruijie(config-if-GigabitEthernet 2/0/20)#no switchport
Ruijie(config-if-GigabitEthernet 2/0/20)#exit
Ruijie(config)#interface gi3/0/20 // F å y N M 2 è Mož
Ruijie(config-if-GigabitEthernet 3/0/20)#no switchport
Ruijie(config-if-GigabitEthernet 3/0/20)#exit
Ruijie(config)#switch virtual domain 1 // µ Z ' — Ö F å % ”
Ruijie(config-vs-domain)#dual-active detection bfd
// ø • BFD y • ¼
Ruijie(config-vs-domain)#dual-active bfd interface
gigabitEthernet 2/0/20
Ruijie(config-vs-domain)#dual-active bfd interface
gigabitEthernet 3/0/20
// F å%² + BFD y N M
Ruijie(config-vs-domain)# dual-active exclude interface
interface-name
// 6 † Ù M k ” y ñ E Ñ ž t Shutdown M
```

# VSU Z' F å

U' Å y i

y i VSU U' Å

y i i • ©k3og#² iû©G• y i•cêUùò y i• h

U' Å y i ¾)		a ç	Ä Ê•vž• (fGôG•vž•k }L Áè #'F` GR... h	y i È ç
ç è É•ä E y i * Å	AP è tMV#	.#	50ms-200ms	3 o
	ECMP/ è Õ ç è è tMV#	.#	50ms-200ms	3 o
VSU ä E y i à i * Å	VSU Ñ / RÑ•	.#	50ms-200ms	3 o
	VSU Ñ / RÑ• e	.#	2s Y Ä	3 o
E Ñ y y i à i * Å	#J VSL e è g G' E ÑÑ y ]Få h	.#	500ms Y Ä	3 o
	Ê Ö			

| Få ¾ Ú

ò ¬ 4 † ¾ Ú Få C « ° ... 6 - k \* f - ò † y

o! iH z ∈ A E Ñ D } Á ° Få †

Æ

• ù ¼ y [www.ruijie.com.cn](http://www.ruijie.com.cn)

÷ ^ y † ú y [www.ruijie.com.cn/service.aspx](http://www.ruijie.com.cn/service.aspx)

i H à ì ð Æ - ´ y [support.ruijie.com.cn](http://support.ruijie.com.cn)

i ð u 4

” ¿ Æ y [webchat.ruijie.com.cn](http://webchat.ruijie.com.cn)

ð u 4 ½ ¿ y 4008-111-000